

PRO

PROFESSIONAL
2025



ACCESORIES



| Accessories



I Bulb LED



1LHG-300
5W - LED SMD
P. 592



HLP06
6W - LED SMD
P. 593



LEGO 08 - HLX08
8W - LED COB
P. 594



LEGO 12 - HLX12
12W - LED COB
P. 595



HLHX01
Honey Acc
P. 594-595

I Driver



3042-D6MmA
DALI/PUSH
P. 597



3030-47MmA
DALI/PUSH/1-10V
jisoiluminacion.com



3038-B3MmA
CASAMBI
jisoiluminacion.com



3BLUE-22DALI
DALI o 1/0-10V
jisoiluminacion.com



3BLUE-22TRAI
Trailing EDGE
jisoiluminacion.com

I Emergency Kit



2DCLEDK1
1 Hour
P. 598



2DCLEDK2
3 Hours
P. 598



2DCLEDK29
3 Hours
P. 599

I Conexión



1DH3
Connector
P. 600



1DH1
Connector
P. 600



1DH0
Spacer
P. 600



1PHB
Lampholder
P. 601



1PHG
Lampholder
P. 601




DCCONDEN-1
Condenser
P. 601



ACCESSORIES

Bulb LED

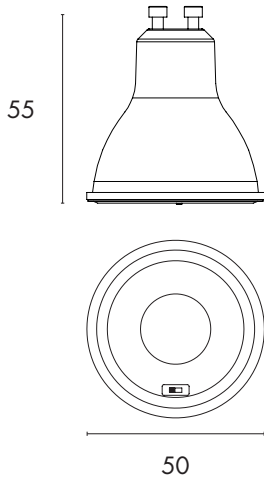


1LHG-300

Lámpara LED SMD
Directo a Red GU-10. No necesita driver externo

LED SMD bulb
Direct Network GU-10. External driver is not necessary

Ampoule LED SMD
Direct au réseau GU-10. Driver externe n'est pas nécessaire

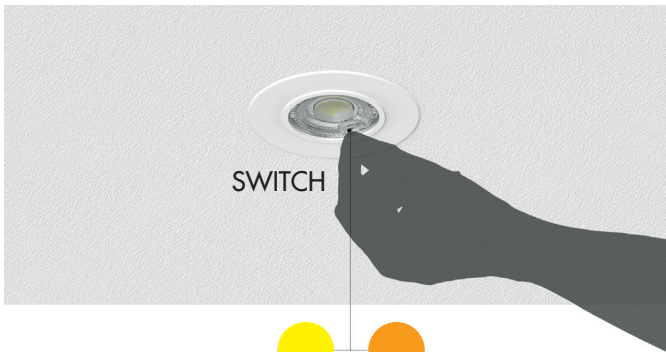

4000K 3000K

1LHG - 300

Model	W	Driver	Brand Chip	K
1LHG-300	5	ON-OFF AC220-240V PF >0,5	Everlight	CCT Switch 3000 452 Lm System 668 Lm Chip 4000 478 Lm System 668 Lm Chip

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 15.000H - 134lm/W (4000K) - RG1




The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult geneal issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 602

HLP06

Módulo LED SMD CCT
Driver externo incluido

SMD LED Module CCT
External driver included

Module LED SMD CCT
Driver externe inclus

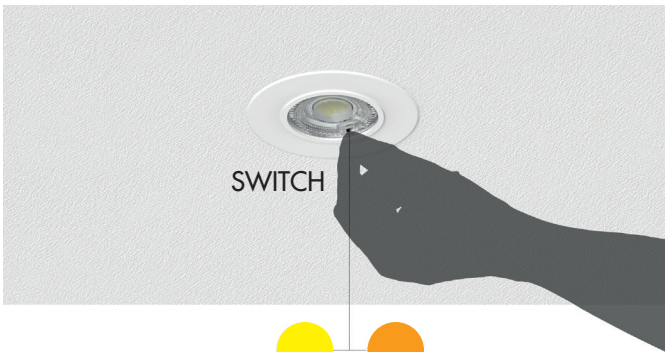

4000K 3000K

HLP 06 - 19 9 0

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K
HLP	6	19 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL Page. 586	9 - Everlight	0 - CCT Switch 3000 432 Lm System 675 Lm Chip 4000 467 Lm System 702 Lm Chip


LED CHIP: SMD 2835 - CRI>80 - L70B10 / 25.000H - 130lm/W (4000K) - RG1



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult geneal issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 602
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 586

ACCESSORIES

Bulb LED


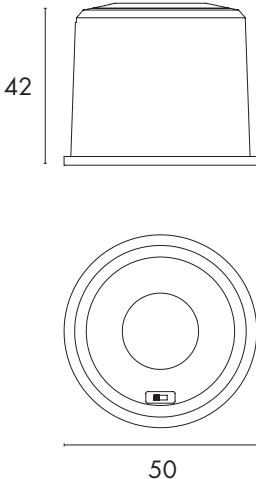


▼ Accessories not included

Emergency Kit		
1EH-3	TCI	1 h
1EH-4	TCI	3 h

ACCESSORIES

Bulb LED

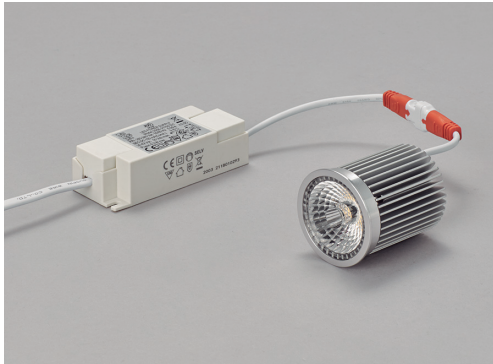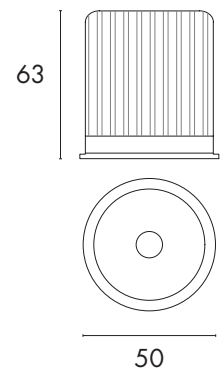

LEGO08 HLX08

Módulo LED COB CRI>90
Driver externo incluido

COB LED Module CRI>90
External driver included

Module LED COB CRI>90
Driver externe inclus





HLX12. LEGO12

Módulo LED COB CRI>90
Driver externo incluido.

COB LED Module CRI>90
External driver included

Module LED COB CRI>90
Driver externe inclus

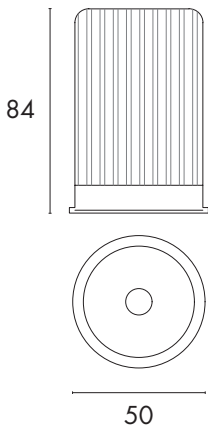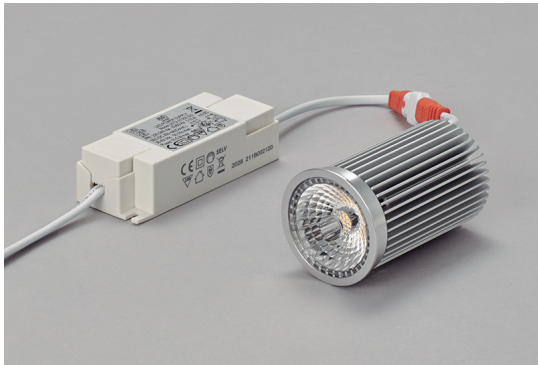

HLX 08 - 21 5 4

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K
HLX	8	21 - ON-OFF AC220-240V PF >0,9 32 - 0-10V AC220-240V PF >0,95 D2 - DALI/PUSH AC220-240V PF >0,95	5 - Edison	2 - 2700 828 Lm Final 1048 Lm Chip 3 - 3000 849 Lm Final 1080 Lm Chip 4 - 4000 891 Lm Final 1104 Lm Chip

LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 138 lm/W (4000K) - RG1



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 602
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 586

HLX 12 - 21 5 4

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K
HLX	12	21 - ON-OFF AC220-240V PF >0,9 32 - 0-10V AC220-240V PF >0,95 51 - Trailing Edge (10W) AC220-240V PF >0,95 D2 - DALI/PUSH AC220-240V PF >0,95 SMART CONTROL Pag. 586	5 - Edison	2 - 2700 1207 Lm System 1572 Lm Chip 3 - 3000 1238 Lm System 1620 Lm Chip 4 - 4000 1300 Lm System 1656 Lm Chip

LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 138lm/W (4000K) - RG1



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 602
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 586

ACCESSORIES

Bulb LED

▼ Accessories not included


- Degree			
Included	Optional	Optional	Optional
60°	A - 15°	I - 24°	M - 38°
Honeycomb			
HLHLX-01			
Emergency Kit			
2DCLEDK1	TCI	1 h	
2DCLEDK2	TCI	3 h	





3042-D6MmA

Driver regulable (Direct Push y DALI)
Driver regulable (Direct Push and DALI)
Driver regulable (Bouton et DALI)

Control: DALI // PUSH
Input voltage: AC220-240V ~ 50/60Hz
Output voltage: 2.5-49Vdc
Output current: 150-1050mA (ajustable con DIP-Switch)
Size: L98 xW43 x H22 mm
Working Temperature: -20° C ~ +45° C

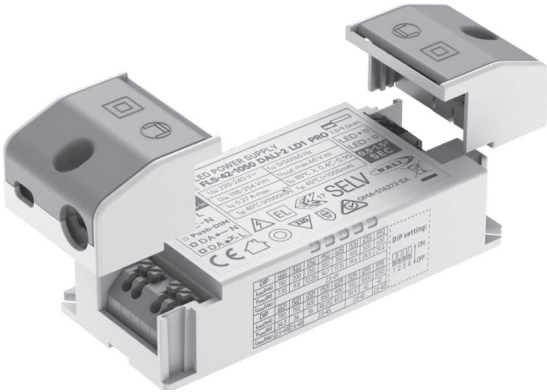


Esquema de conexión

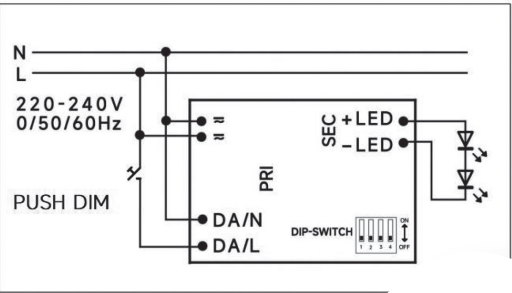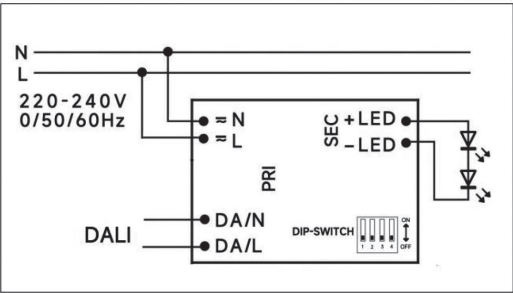

Configuration 3042-D6MmA

Pin (W)	Iout (mA)	Vout (VDC)	1	2	3	4
7.35	150	2.5-49	--	--	--	--
9.8	200	2.5-49	ON	--	--	--
12.25	250	2.5-49	--	ON	--	--
14.7	300	2.5-49	ON	ON	--	--
17.15	350	2.5-49	--	--	ON	--
19.6	400	2.5-49	ON	--	ON	--
24.5	500	2.5-49	--	ON	ON	--
29.4	600	2.5-49	ON	ON	ON	--
34.3	700	2.5-49	--	--	--	ON
36	750	2.5-48	ON	--	--	ON
36	800	2.5-45	--	ON	--	ON
38.25	850	2.5-45	ON	ON	--	ON
40.5	900	2.5-45	--	--	ON	ON
39.9	950	2.5-42	ON	--	ON	ON
42	1000	2.5-42	--	ON	ON	ON
42	1050	2.5-40	ON	ON	ON	ON



Válido para luminarias existentes que cumplan estos rangos.
Datos a revisar en la luminaria instalada.
Consulte para más información.

It is valid for luminaires which meet these ranges.
This data need to be checked in the existing luminaire.
If you need more information, please, consult.


Il est valide pour luminaires qui doivent être compatible avec ce gammes.
Ces données doivent être revues dans le luminaire existant.
Si vous avez besoin d'information additionnel consultez s'il vous plait.



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consulti general issues - www.jisoiluminación.com (Download - Technical Information)

ACCESSORIES

Emergency Kit

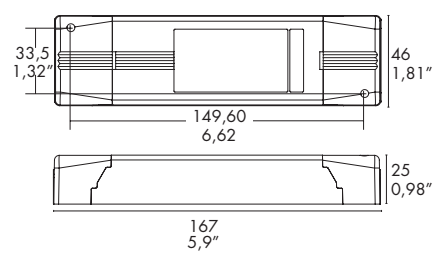


2DCLEDK1 / 2DCLEDK2

Kit de Emergencia

Emergency Kit

Systèmes d'éclairage de courtoisie LED pour les cas d'urgence

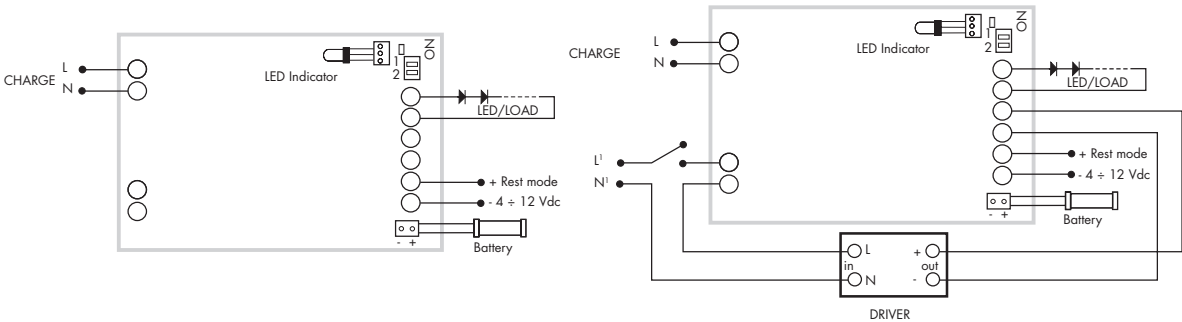

Model	REF.	Model	REF.	Model	REF.	Model	REF.
26324	2DCLEDK1	50615	2DCLEDK1/K2	CAVE 22	2DCLEDK1/K2	LAKE RWC10	2DCLEDK1/K2
26330	2DCLEDK1	50625	2DCLEDK1/K2	CAVE 30	2DCLEDK1/K2	OWL R2L	2DCLEDK1/K2
26424	2DCLEDK1	50708	2DCLEDK1/K2	CAVE RW10	2DCLEDK1/K2	OWL R4L	2DCLEDK1/K2
24630	2DCLEDK1	50715	2DCLEDK1/K2	EAGLE R2L	2DCLEDK1/K2	OWL R5L	2DCLEDK1/K2
32128	2DCLEDK1/K2	51010	2DCLEDK1/K2	EAGLE R5L	2DCLEDK1/K2	SLATE RD07	2DCLEDK1/K2
32140	2DCLEDK1/K2	51022	2DCLEDK1/K2	EAGLE R10L	2DCLEDK1/K2	SLATE RS07	2DCLEDK1/K2
32256	2x2DCLEDK1/K2	51030	2DCLEDK1/K2	EAGLE RT5L	2DCLEDK1/K2	SLATE RS14	2DCLEDK1/K2
32280	2x2DCLEDK1/K2	51122	2DCLEDK1/K2	HAWK R12	2DCLEDK1/K2	SLATE RST07	2DCLEDK1/K2
32428	2DCLEDK1/K2	51130	2DCLEDK1/K2	HAWK R18	2DCLEDK1/K2	SLATE RST14	2DCLEDK1/K2
32440	2DCLEDK1/K2	51133	2DCLEDK1/K2	HAWK R24	2DCLEDK1/K2		
32740	2DCLEDK1/K2	51140	2DCLEDK1/K2	LAKE R10	2DCLEDK1/K2	HIX08	2DCLEDK1/K2
32940	2DCLEDK1/K2	51224	2DCLEDK1/K2	LAKE R20	2DCLEDK1/K2	HIX12	2DCLEDK1/K2
32980	2x2DCLEDK1/K2	53030	2DCLEDK1/K2	LAKE R30	2DCLEDK1/K2		
39837	2DCLEDK1/K2	53510	2DCLEDK1/K2	LAKE RS10	2DCLEDK1/K2	55307	1EH-3/4
50212	2DCLEDK1/K2	53515	2DCLEDK1/K2	LAKE RS20	2DCLEDK1/K2	55806	1EH-3/4
50220	2DCLEDK1/K2	53522	2DCLEDK1/K2	LAKE RS30	2DCLEDK1/K2	55906	1EH-3/4
50408	2DCLEDK1/K2	53533	2DCLEDK1/K2	LAKE RT10	2DCLEDK1/K2	HLP06	1EH-3/4
50415	2DCLEDK1/K2	53710	2DCLEDK1/K2	LAKE RTS10	2DCLEDK1/K2	57106	1EH-3/4
50422	2DCLEDK1/K2	53724	2DCLEDK1/K2	LAKE RTW10	2DCLEDK1/K2	57306	1EH-3/4
50519	2DCLEDK1/K2	CAVE 10	2DCLEDK1/K2	LAKE RTWC10	2DCLEDK1/K2	1LHG-300	1EH-3/4
50608	2DCLEDK1/K2	CAVE 15	2DCLEDK1/K2	LAKE RW10	2DCLEDK1/K2		

The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminación.com (Download - Technical Information)

ACCESSORIES

Emergency Kit




2DCLEDK29

Kit de Emergencia

Emergency Kit

Systèmes d'éclairage de courtoisie LED pour les cas d'urgence

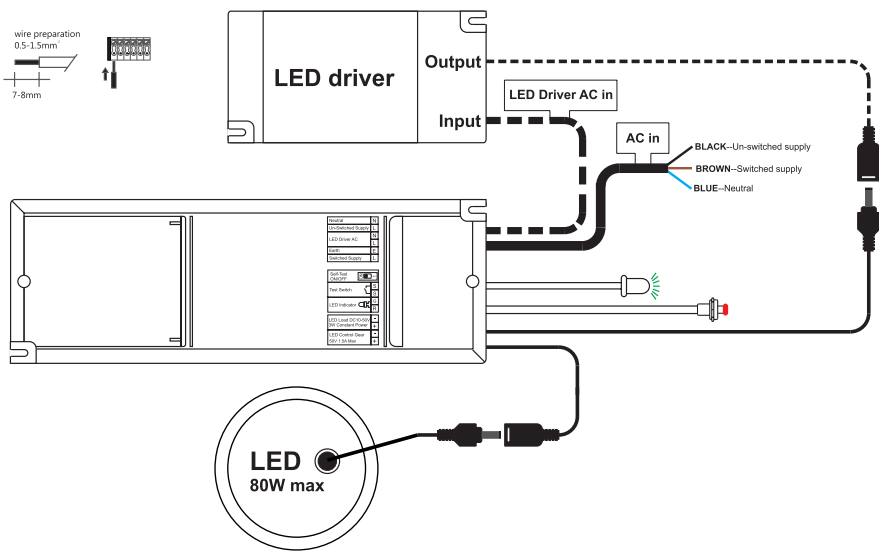

Model	Model	Model	Model	Model	Model	Model
32128	50207	50615	51115	53710	HAWK R18	OWL R4L
32140	50212	50625	51122	53724	HAWK R24	OWL R5L
32256	50308	50708	51130	55108	LAKE R20	SLATE RS07
32280	50315	50715	51133	55115	LAKE R30	SLATE RS14
32428	50322	50725	51140	55122	LAKE RS20	SLATE RST07
32440	50330	51015	51224	CAVE 15	LAKE RS30	SLATE RST14
32740	50408	51022	53030	CAVE 30	LAKE RTWC10	
32940	50415	51030	53510	EAGLE R5L	LAKE RS30	
32980	50422	51033	53515	EAGLE R10L	LAKE RTWC10	
39137	50519	51040	53522	EAGLE RT5L	LAKE RWC10	
39837	50608	51110	53533	HAWK R12	OWL R2L	

The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminación.com (Download - Technical Information)


ACCESSORIES

Connectors



1DH3

Bloque Conexión con portalámpara GU10 100-240V ☐
GU10 Fast Safety connector 100-240V ☐
Connecteur avec douille GU10 100-240V ☐

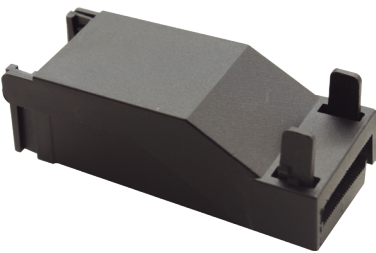

1DH1

Bloque Conexión
Fast Safety connector
Connecteur rapide




1DH0

Distanciador metálico para bloque
de conexión 1DH1 y 1DH3
Metal spacer for Safety connector 1DH1 y 1DH3
Métal entretoise pour boîte de connexion 1DH1 y 1DH3



1PHB

Lámpara GU10-GZ10 ☐
Lampholder GU10-GZ10 ☐
Douille GU10-GZ10 ☐

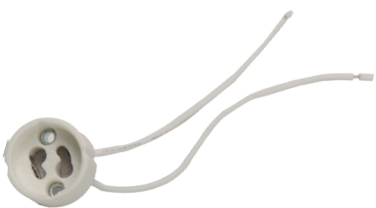


1PHG

Portalámparas GU10 100-240V ☐
Lampholder GU10 100-240V ☐
Douille GU10 100-240V ☐



DCCONDEN-1

Condensador
Condenser
Condensateu

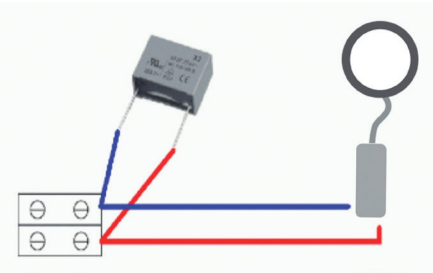

The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)



TARIFA PVP