




DOTS

JISO ILUMINACIÓN

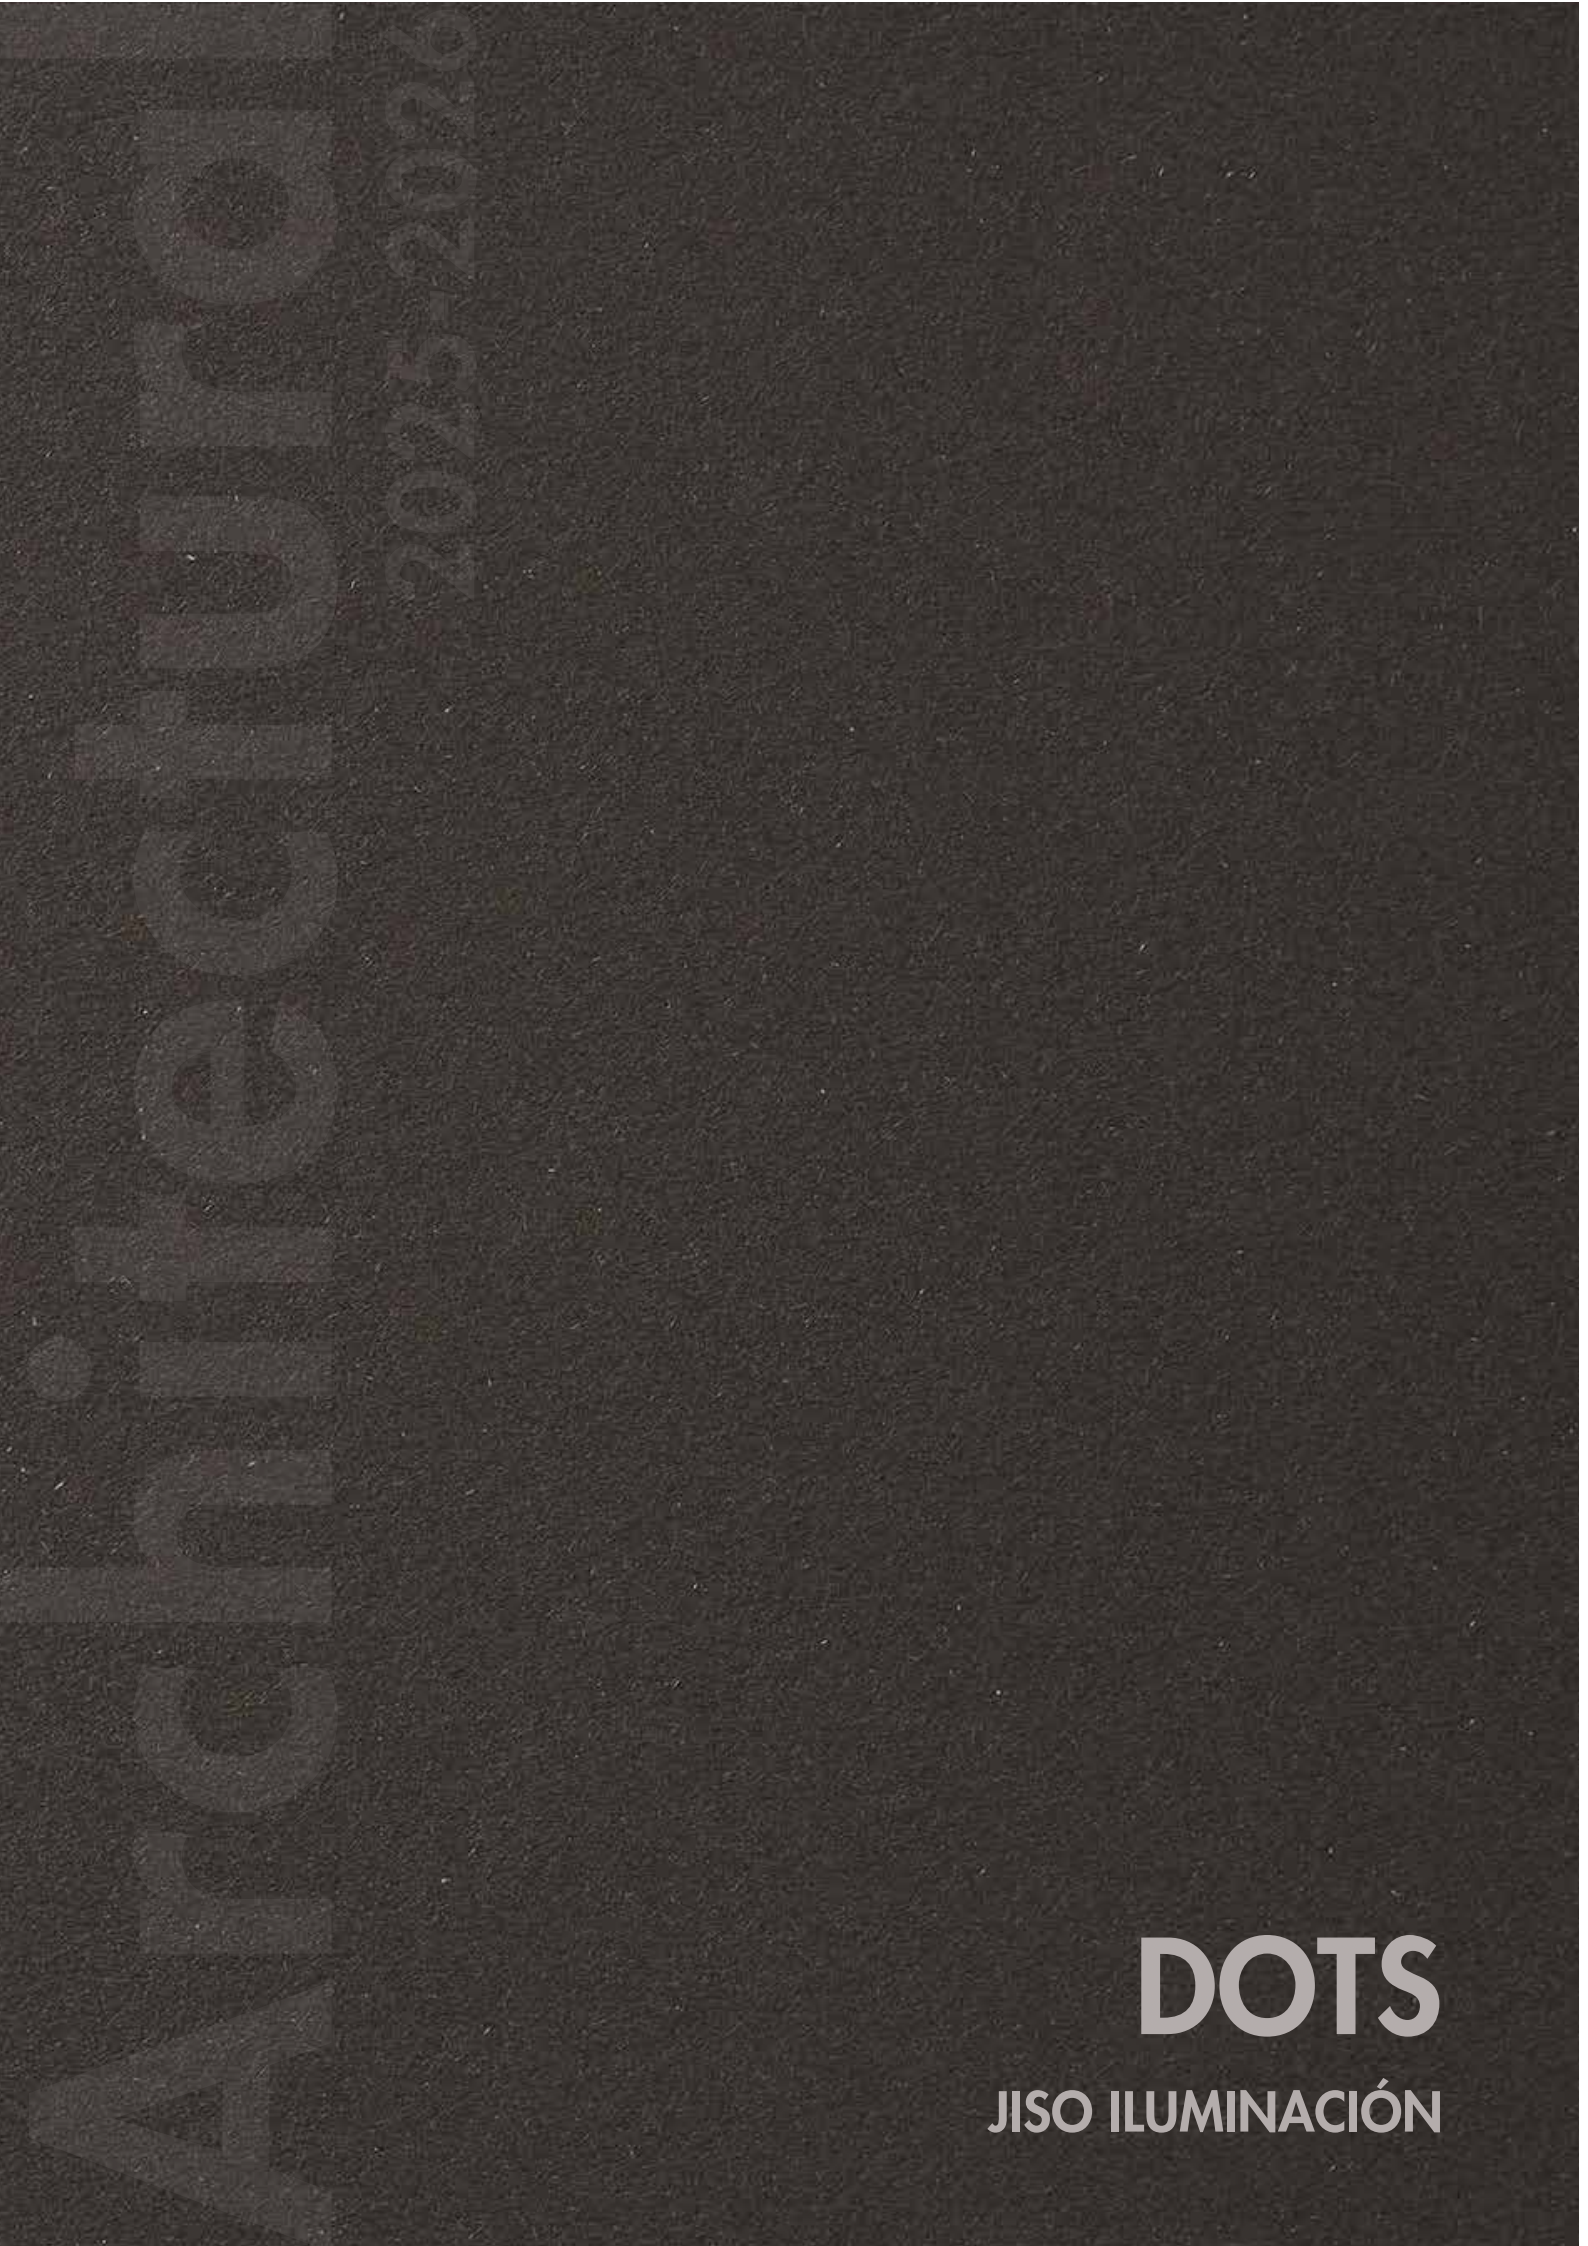

INDOOR

DOTS

EAGLE R
EAGLE RT
EAGLE S
OWL R
HAWK R
HAWK S









Private Residential, UAE- JISO


EAGLE R2L



7ID501 06 - 21 N 4 - 9001
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID501	06	21 ON/OFF (PF >0,5) 37 1-10V 51 Trailing Edge D2 DALI/PUSH	A 15° J 30° N 45°	3 3000K 420 lm system 678 lm source 4 4000K 441 lm system 720 lm source	9001 9009 9090 0101 0109

LED SMD CRI >90 RG1 MAC Adam <3 50.000H L70B10 120 lm/W UGR <19 1/50




EAGLE RL5



7ID501 10 - 21 N 4 - 9001
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID501	10	21 ON/OFF (PF >0,5) 32 0-10V 51 Trailing Edge D2 DALI/PUSH	A 15° J 30° N 45°	3 3000K 800 lm system 1130 lm source 4 4000K 840 lm system 1200 lm source	9001 9009 9090 0101 0109

LED SMD CRI >90 RG1 MAC Adam <3 50.000H L70B10 120 lm/W UGR <19 1/50



Accessories not incl.

Emergency kit (page 523) 2DCLED- K1 (1 hour)
K2 (3 hours)
K29 (3 hours)

SMART CONTROL (page 534)

TOP CLASE II ALUM PC AC 220/240V 50/60Hz PF >0,9 INCL. 650° CB IP 20 5 years Warranty




EAGLE R10L



7ID501 20 - 21 N 4 - 9001
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID501	20	21 ON/OFF 32 0-10V 51 Trailing Edge D2 DALI/PUSH	A 15° J 30° N 45°	3 3000K 1600 lm system 2260 lm source 4 4000K 1680 lm system 2400 lm source	9001 9009 9090 0101 0109



LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	120 lm/W	UGR <19	1/50
---------	---------	-----	-------------	----------------	----------	---------	------

Accesories not incl.

Emergency kit (page 523)	2DCLED- K1 (1 hour) K2 (3 hours) K29 (3 hours)
--------------------------	--

SMART CONTROL (page 534)

TOP						AC 220/240V	50/60Hz	PF >0,9		INCL.	650°	CB	IP 20	5 years Warranty
-----	--	--	--	--	--	-------------	---------	---------	--	-------	------	----	-------	------------------

The above information is basic. For updated and more accurate information, please consult the Technical Data Sheet at www.jisoiluminacion.com or through the QR code




EAGLE RT5L



7ID601 10 - 21 N 4 - 9001

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID601	10	21 ON/OFF (PF >0,5) 32 0-10V 51 Trailing Edge D2 DALI/PUSH	A 15° J 30° N 45°	3 3000K 800 lm system 1130 lm source 4 4000K 840 lm system 1200 lm source	90 01 90 09 90 90

LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	120 lm/W	UGR <19	1/20
---------	---------	-----	-------------	----------------	----------	---------	------




EAGLE S5L



7ID201 10 - 21 N 4 - 9001

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID201	10	21 ON/OFF (PF >0,5)	A 15° J 30° N 45°	3 3000K 800 lm system 1130 lm source 4 4000K 840 lm system 1200 lm source	90 01 90 09 90 90

LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	120 lm/W	UGR <19	1/60
---------	---------	-----	-------------	----------------	----------	---------	------

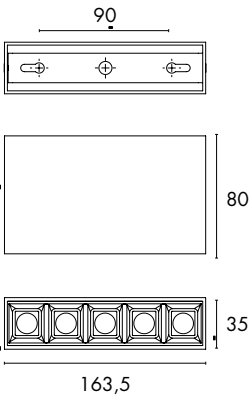

Accessories not incl.

Emergency kit (page 523)	2DCLED- K1 (1 hour) K2 (3 hours) K29 (3 hours)
--------------------------	--

SMART CONTROL (page 534)

TOP	INCL	CLASE II	ALUM	PC	AC 220/240V	50/60Hz	PF >0,9	INCL	650°	CB	IP 20	5 years Warranty
-----	------	----------	------	----	-------------	---------	---------	------	------	----	-------	------------------




OWL R2L



7ID512 10 - 21 W 4 - 9018
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID512	10	21 ON/OFF 32 0-10V 51 Trailing Edge D2 DALI/PUSH	A 15° I 24° W 50°	3 3000K 880 lm system 1280 lm source 4 4000K 924 lm system 1350 lm source	90 18
LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	135 lm/W
					UGR <19




OWL R4L



7ID512 12 - 21 W 4 - 9018
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID512	14	21 ON/OFF 32 0-10V 51 Trailing Edge D2 DALI/PUSH	A 15° I 24° W 50°	3 3000K 1080 lm system 1536 lm source 4 4000K 1134 lm system 1620 lm source	90 18
LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	135 lm/W
					UGR <19



Accessories not incl.

Emergency kit (page 523)

2DCLED- K1 (1 hour)
K2 (3 hours)
K29 (3 hours)

SMART CONTROL (page 534)




OWL R5L



7ID512 20 - 21 W 4 - 9018
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID512	20	21 ON/OFF 32 0-10V 51 Trailing Edge D2 DALI/PUSH	A 15° I 24° W 50°	3 3000K 1840 lm system 2560 lm source 4 4000K 1932 lm system 2700 lm sour	90 18



LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	135 lm/W	UGR <19
------------	------------	-----	----------------	-------------------	----------	------------

Accesories not incl.

Emergency kit (page 523)	2DCLED- K1 (1 hour) K2 (3 hours) K29 (3 hours)
--------------------------	--

SMART CONTROL (page 534)

TOP		CLASE II		ALUM	PC	AC 220/240V	50/60Hz	PF >0,9	INCL.	650°	CB	IP 20	5 years Warranty
-----	--	----------	--	------	----	----------------	---------	------------	-------	------	----	----------	---------------------

The above information is basic. For updated and more accurate information, please consult the Technical Data Sheet at www.jisoiluminacion.com or through the QR code


HAWK R06



7ID525 06 - 21 M 3 - 9001

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID525	06	21 ON/OFF	M 38°	3 3000K 502 lm system 610 lm source	01 01 90 01

LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	113 lm/W	UGR <19	1/20
---------	---------	-----	-------------	----------------	----------	---------	------




HAWK R12



7ID525 12 - 21 M 3 - 9001

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID525	12	21 ON/OFF	M 38°	3 3000K 1024 lm system 1220 lm source	01 01 90 01

LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	113 lm/W	UGR <19	1/20
---------	---------	-----	-------------	----------------	----------	---------	------



Accessories not incl.

Emergency kit (page 523)

2DCLED- K1 (1 hour)
K2 (3 hours)
K29 (3 hours)






HAWK R18



7ID525 18 - 21 M 3 - 9001

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID525	18	21 ON/OFF	M 38°	3 3000K 1585 lm system 1831 lm source	01 01 90 01

LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	113 lm/W	UGR <19	1/20
---------	---------	-----	-------------	----------------	----------	---------	------




HAWK R24



7ID525 24 - 21 M 3 - 9001

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID525	24	21 ON/OFF	M 38°	3 3000K 1910 lm system 2441 lm source	01 01 90 01

LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	113 lm/W	UGR <19	1/10
---------	---------	-----	-------------	----------------	----------	---------	------



Accessories not incl.

Emergency kit (page 523)	2DCLED- K1 (1 hour) K2 (3 hours) K29 (3 hours)
--------------------------	--

TOP	IP65	CLASS II	ALUM	PC	AC 220/240V	50/60Hz	PF >0,9	INCL.	650°	CB	IP 20	5 years Warranty
-----	------	----------	------	----	-------------	---------	---------	-------	------	----	-------	------------------



HAWK S12




7ID225 12 - 21 M 3 - 9001
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID225	12	21 ON/OFF	M 38°	3 3000K 1024 lm system 1220 lm source	01 01 90 01
LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	113 lm/W
			UGR <19		1/40



45



119

HAWK S18




7ID225 18 - 21 M 3 - 0101
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID225	18	21 ON/OFF	M 38°	3 3000K 1585 lm system 1831 lm source	01 01 90 01
LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	113 lm/W
			UGR <19		1/20



45



164

HAWK S24




7ID225 24 - 21 M 3 - 9001
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7ID225	24	21 ON/OFF	M 38°	3 3000K 1910 lm system 2441 lm source	01 01 90 01
LED SMD	CRI >90	RG1	MAC Adam <3	50.000H L70B10	113 lm/W
			UGR <19		1/10



45



209



JISO ILUMINACIÓN