

PANEL
JISO ILUMINACIÓN

PANEL

365

398

324

329

391

321

327

322





36540



365 40 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
365	40	29 ON/OFF	8 Sanan	4 4000K 4516 lm system 4800 lm source	90

LED SMD CRI >80 RG1 MAC Adam <5 50.000H L70B10 120 lm/W 120° UGR <19 1/4






1 - Model	2 - Power [W]	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
398	26	29 ON/OFF	8 Sanan	4 4000K	90
	30	37 0-10V		3241 lm system	
	33	D7 DALI/PUSH		3726 lm system	
	37			4237 lm system	
				4634 lm system	
				5210 lm source	

Technical drawing of a square base. The base is a square with dimensions 595x595. The height of the base is 134.

Emergency kit (page 523) 2DCLED- K1 (1 hour)
K2 (3 hours)
K29 (3 hours)

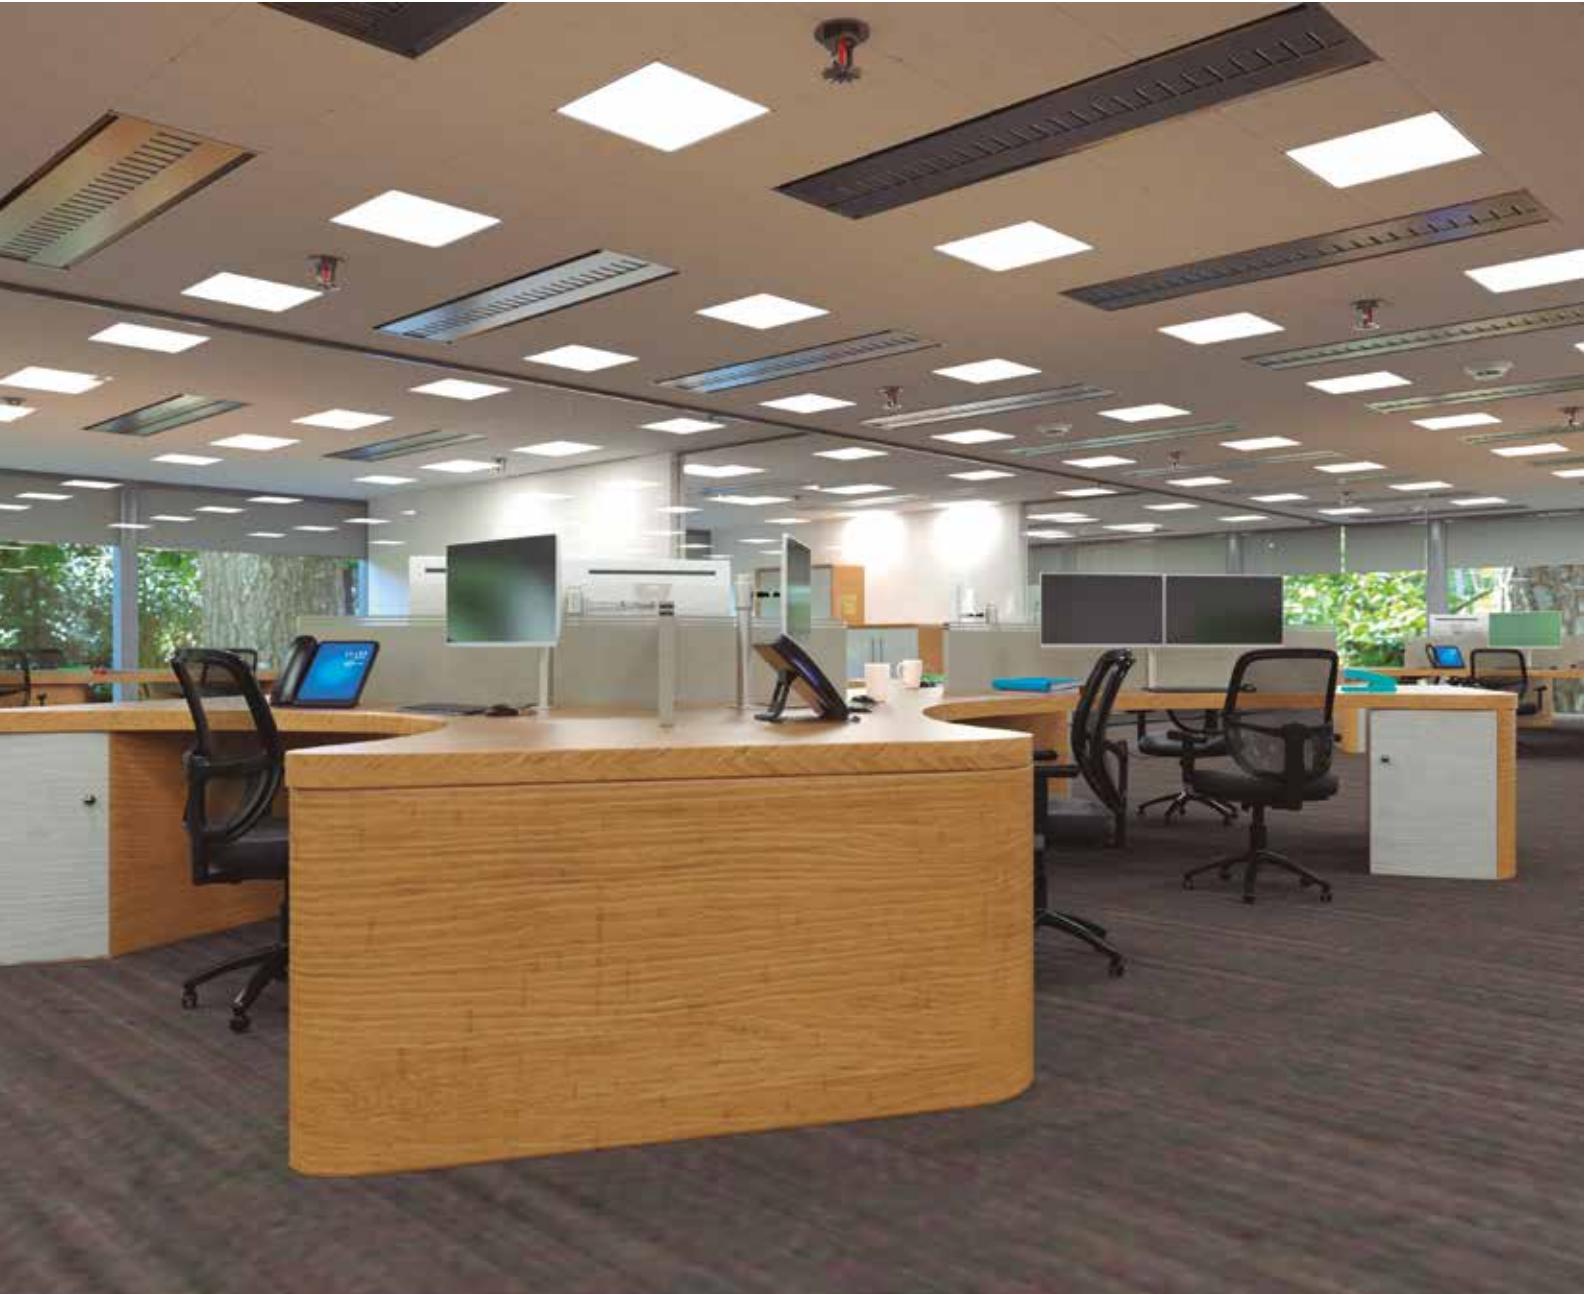


32440



324 40 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
324	40	29 ON/OFF 21 ON/OFF 37 1 -10V (36W) 51 Trailing Edge D7 DALI/PUSH	8 Sanan	3 3000K 3932 lm system 4882 lm source 4 4000K 4054 lm system 4882 lm source 6 6500K 4297 lm system 4882 lm source	90



LED SMD CRI >80 RG0 MAC Adam <5 100.000H L80B10 136 lm/W 120° UGR <19 80

32428



324 28 - 21 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
324	28	29 ON/OFF 37 1 -10V 51 Trailing Egde D7 DALI/PUSH	8 Sanan	4 4000K 2854 lm system 3417 lm source	90

LED SMD CRI >80 RG1 MAC Adam <5 100.000H L80B10 136 lm/W 120° UGR <17 1/5

Accesories not incl.

Emergency kit (page 523)	2DCLED- K1 (1hour) K2 (3 hours) K29 (3 hours)
--------------------------	---

SMART CONTROL (page 534)


PRO CLASE II ALUM AC 220/240V 50/60Hz PF >0,9 650° IP 44 5 years Warranty

The above information is basic. For updated and more accurate information, please consult the Technical Data Sheet at www.jisoiluminacion.com or through the QR code




Maria Inmaculada - Hijas De La Caridad

32940



329 40 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
329	40	29 ON/OFF 21 ON/OFF 37 1 -10V 51 Trailing Edge (36W) D7 DALI/PUSH	8 Sanan	3 3000K 3903 lm system 4882 lm source 4 4000K 4024 lm system 4882 lm source 6 6500K 4265 lm system 4882 lm source	90



LED SMD CRI >80 RG0 MAC Adam <5 100.000H l80B10 136 lm/W 90° UGR <17 1/5

Accesories not incl.

Emergency kit (page 523)	2DCLED- K1 (1hour) K2 (3 hours) K29 (3 hours)
--------------------------	---

SMART CONTROL (page 534)

PRO CLASE II ALUM AC 220/240V 50/60Hz PF >0,9 650° IP 43 5 years Warranty

The above information is basic. For updated and more accurate information, please consult the Technical Data Sheet at www.jsoiluminacion.com or through the QR code


39137




391 37 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
391	26 30 33 37	29 ON/OFF 37 1 -10V D7 DALI/PUSH	8 Sanan	4 4000K 3342 lm system 3719 lm system 4063 lm system 4339 lm system 5210 lm source	90

LED SMD CRI >90 RG1 MAC Adam <5 50.000H L80B10 160 lm/W 90° UGR <17 1/5




134



1195x295


High Efficiency. 160 lm/W



Micro Prismatic Diffuser UGR<17



Multipower

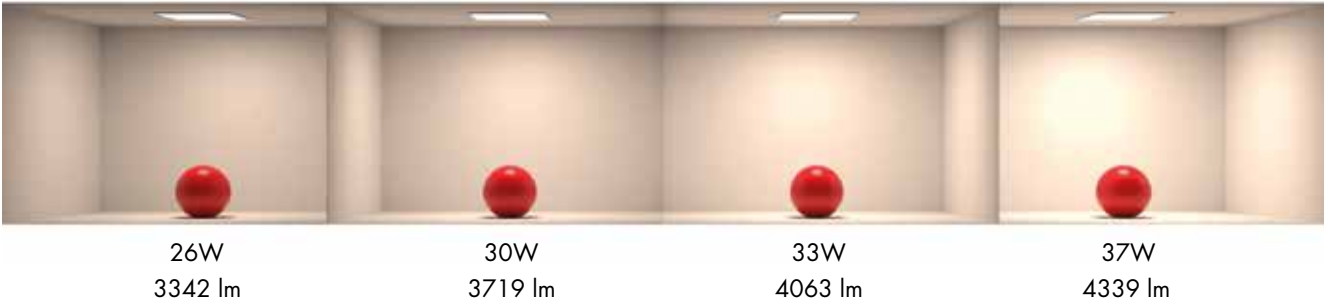

Accesories not incl.

Emergency kit (page 523)	2DCLED- K1 (1hour) K2 (3 hours) K29 (3 hours)
--------------------------	---



32128



321 28 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
321	28	29 ON/OFF 21 ON/OFF 37 1-10V 51 Trailing Edge D7 DALI/PUSH	8 Sanan	4 4000K 2794 lm system 3417 lm source	90

LED SMD	CRI >80	RG1	MAC Adam <5	100.000H L80B10	136 lm/W	120°	UGR <19	1/5
---------	---------	-----	-------------	-----------------	----------	------	---------	-----



32140



321 40 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
321	40	29 ON/OFF 21 ON/OFF 37 1-10V 51 Trailing Edge (36W) D7 DALI/PUSH	8 Sanan	4 4000K 3991 lm system 4882 lm source	90

LED SMD	CRI >80	RG1	MAC Adam <5	100.000H L80B10	136 lm/W	120°	UGR <19	1/5
---------	---------	-----	-------------	-----------------	----------	------	---------	-----

Accessories not incl.

Emergency kit (page 523)	2DCLED- K1 (1hour) K2 (3 hours) K29 (3 hours)
--------------------------	---

SMART CONTROL (page 534)

PRO						AC 220/240V	50/60Hz	PF >0,9		650°	IP 44	5 years Warranty
-----	--	--	--	--	--	-------------	---------	---------	--	------	-------	------------------

The above information is basic. For updated and more accurate information, please consult the Technical Data Sheet at www.jisoiluminacion.com or through the QR code




32740



327 40 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
327	40	29 ON/OFF 21 ON/OFF 37 1 -10V 51 Trailing Edge (36W) D7 DALI/PUSH	8 Sanan	4 4000K 3991 lm system 4882 lm source	90



LED SMD | CRI >80 | RG1 | MAC Adam <5 | 100.000H L80B10 | 136 lm/W | 90° | UGR <17 | 1/5

Accesories not incl.

Emergency kit (page 523)	2DCLED- K1 (1hour) K2 (3 hours) K29 (3 hours)
--------------------------	---

SMART CONTROL (page 534)

PRO | CLASE II | ALUM | PMMA | AC 220/240V | 50/60Hz | PF >0,9 | INCL | 650° | IP 43 | 5 years Warranty

The above information is basic. For updated and more accurate information, please consult the Technical Data Sheet at www.jisoiluminacion.com or through the QR code




32980



329 80 - 29 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
329	80	29 ON/OFF 21 ON/OFF 37 0-10V 51 Trailing Edge (72W) D7 DALI/PUSH	8 Sanan	4 4000K 8099 lm system 10017 lm source	90



LED SMD CRI >80 RG1 MAC Adam <5 100.000H L80B10 139 lm/W UGR <17 90° IP 43 1/4

32256



322 56 - 21 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Chip	5 - Kelvin	6 - Color
322	56	21 ON/OFF 37 1-10V 51 Trailing Edge D7 DALI/PUSH	8 Sanan	4 4000K 5619 lm system 7006 lm source	90

LED SMD CRI >80 RG1 MAC Adam <5 100.000H L80B10 139 lm/W UGR <19 120° IP 44 1/4

Accessories not incl.

Emergency kit (page 523)	2DCLED- K1 (1hour) K2 (3 hours) K29 (3 hours)
--------------------------	---

SMART CONTROL (page 534)

PRO  CLASE II  ALUM  PMMA  AC 220/240V 50/60Hz PF >0,9  INCL. 650° 5 years Warranty

Recessed Acc.



Table with 6 columns: Model, Accessories for below references, Size, Curt, [Icon], Color. Rows include DC30040-3, DC30140-3, and DC30180-3.




Table with 6 columns: Model, Accessories for below references, Size, Curt, [Icon], Color. Row includes DC31036-2.

Surface Acc.




Table with 6 columns: Model, Accessories for below references, Size, Curt, [Icon], Color. Rows include DC32440-4, DC32140-4, and DC32280-4.



Table with 6 columns: Model, Accessories for below references, Size, Curt, [Icon], Color. Rows include DC6060-4, DC12030-4, and DC12060-4.

3 years Warranty

Pendant Acc.



Table with 6 columns: Model, Accessories for below references, Size, Curt, [Icon], Color. Rows include DC31036-1 and DC31640-0 Security.



JISO ILUMINACIÓN