



SURFACE



| Surface

I Surface. Dots



EAGLE S5L
10W
P. 407



HAWK S12
12W
jisoiluminacion.com



HAWK S18
18W
jisoiluminacion.com



HAWK S24
24W
jisoiluminacion.com

I Surface. Tubule



SLATE S10
10W
jisoiluminacion.com



SLATE S20
20W
jisoiluminacion.com



I Surface. Technical



29010
10W
P. 409



26308
8W
P. 410



26408
8W
P. 414



21606
6W
P. 418



21406
6W
P. 421



25015
15W - Sensor
P. 424



26314
14W
P. 411



26414
14W
P. 415



21612
12W
P. 419



21412
12W
P. 422



27020
20W - Sensor
P. 425



26324
24W
P. 412



26424
24W
P. 416




21618
18W
P. 420



21418
18W
P. 423



26330
30W
P. 413




26430
30W
P. 417





EAGLE S5L

Dots



7ID201 10 - 21 N 3 - 9001

1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Degree	5 - K	6 - Color
7ID201	10	21 - ON-OFF AC220-240V PF >0,5	A - 15° J - 30° N - 45°	3 - 3000 800 Lm System 1130 Lm Chip (45°) 4 - 4000 840 Lm System 1200 Lm Chip (45°)	9001 Blanco T.-Negro / Blanc T.-Noir 9009 Blanco T.-Oro T. / Blanc T.-Or T. 9090 T. White / Blanco T. / Blanc T.

▼ Accessories not included

Emergency Kit	
2DCLEDK1	1 h
2DCLEDK2	3 h

LED CHIP: SMD 3030 - CRI>90 - L70/B10 / 50.000H - 120 lm/W (4000K) - RG1




Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Emergency Kit instructions at www.jisoiluminacion.com



29010

Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie

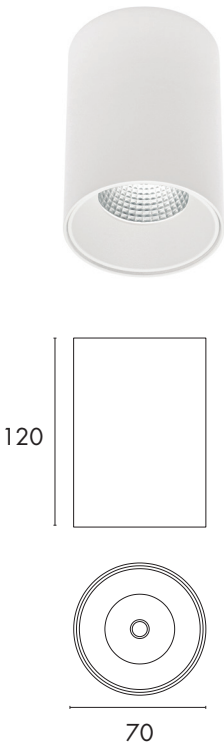

290 10 - 28 8 3 - 90


1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
290	10	28 - ON-OFF AC220-240V PF >0,5	8 - Edison	3 - 3000 915 Lm System 1353 Lm Chip 4 - 4000 941 Lm System 1380 Lm Chip	01 Black / Negro / Noir 08 Grey / Gris / Gris 90 T. White / Blanco T. / Blanc T.


LED CHIP: COB - CRI>80 - L70/B10 / 50.000H - 113 lm/W (4000K) - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)

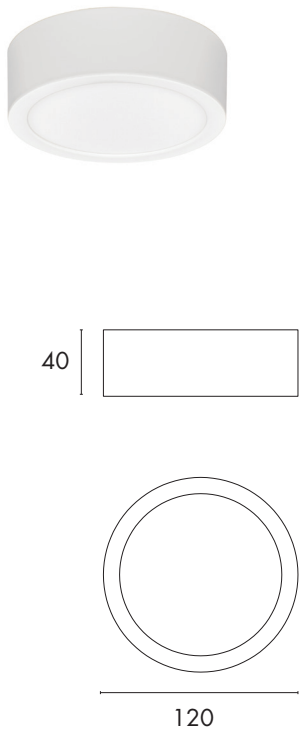

26308
Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie

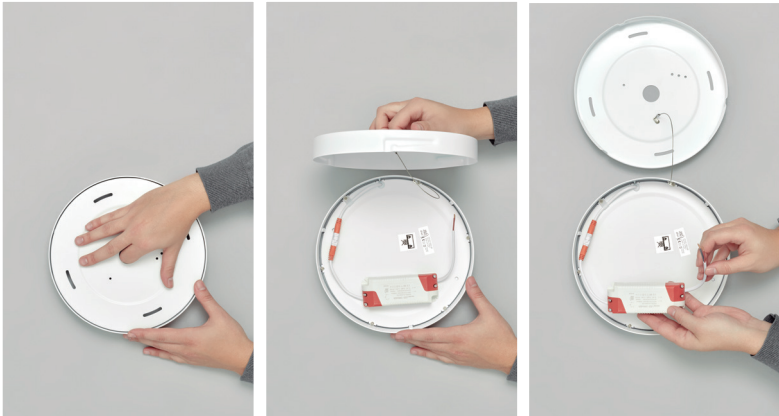

Improved
Greater tightness IP43
Best aesthetics without screws or slots
Easy installation
Safety cable
Regulation and control admitted

263 08 - 21 8 4 - 90

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
263	8	21 - ON-OFF AC220-240V PF >0,9 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL Page 586	8 - Edison	0 - CCT Switch 2700 - 547 Lm 3000 - 561 Lm 4000 - 633 Lm 3 - 3000 561 Lm System 960 Lm Chip 4 - 4000 633 Lm System 960 Lm Chip	01 Black / Negro / Noir (CCT Switch) 90 Blanco T. / Blanc T. (3000K&4000K)

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 120 lm/W (4000K) - RGO




Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586

26314
Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie



Without screws & hole, fixed to ceiling by rotation system

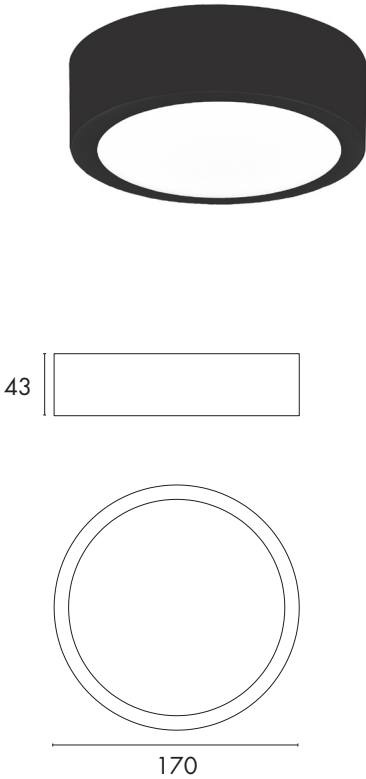


263 14 - 21 8 0 - 01

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
263	14	21 - ON-OFF AC220-240V PF >0,9 32 - 0-10V AC220-240V PF >0,95 51 - Trailing Edge AC220-240V PF >0,9 D2 - DALI/PUSH AC220-240V PF >0,95 SMART CONTROL Page 586	8 - Edison	0 - CCT Switch 2700 - 993 Lm 3000 - 1018 Lm 4000 - 1159 Lm 3 - 3000 1018 Lm System 1680 Lm Chip 4 - 4000 1159 Lm System 1680 Lm Chip	01 Black / Negro / Noir (CCT Switch) 90 Blanco T. /Blanc T. (3000K&4000K)

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 120 lm/W (4000K) - RGO



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586

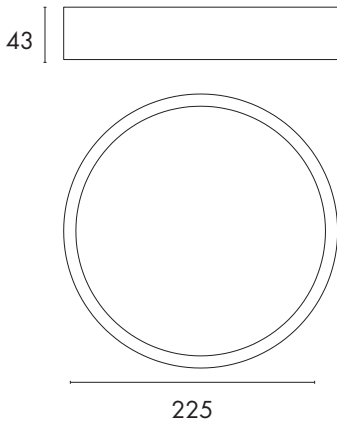

26324
Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie




Without screws & hole, fixed to ceiling by rotation system

26330
Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie



Without screws & hole, fixed to ceiling by rotation system

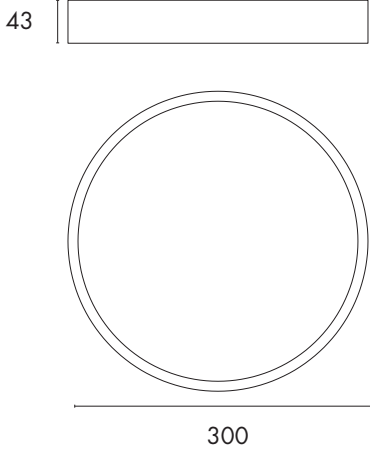

263 24 - 21 8 0 - 01
1 2 3 4 5 6

Table with 6 columns: 1 - Model, 2 - W, 3 - Driver, 4 - Brand Chip, 5 - K, 6 - Color. It lists specifications for the 26324 model, including power (24W), driver options (ON-OFF, Trailing Edge, DALI/PUSH, SMART CONTROL), chip options (Edison, 3000, 4000), and color options (Black/Negro, White/Blanco).

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 120 lm/W (4000K) - RG0



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Emergency Kit instructions at www.jisoiluminacion.com
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586

263 30 - 21 8 3 - 90
1 2 3 4 5 6

Table with 6 columns: 1 - Model, 2 - W, 3 - Driver, 4 - Brand Chip, 5 - K, 6 - Color. It lists specifications for the 26330 model, including power (30W), driver options (ON-OFF, Trailing Edge, DALI/PUSH, SMART CONTROL), chip options (Edison, 3000, 4000), and color options (Black/Negro, White/Blanco).

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 120 lm/W (4000K) - RG0





Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Emergency Kit instructions at www.jisoiluminacion.com
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586



26408

Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie

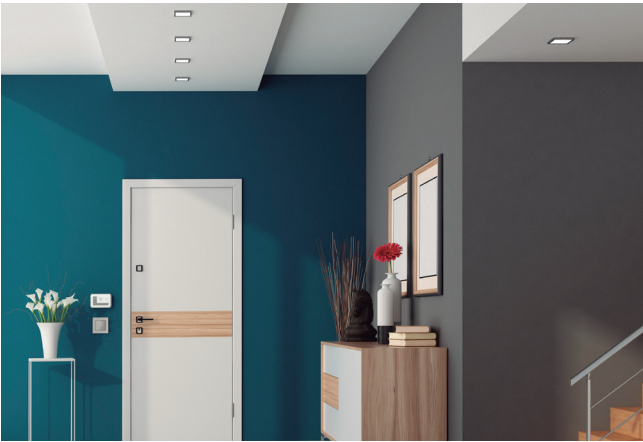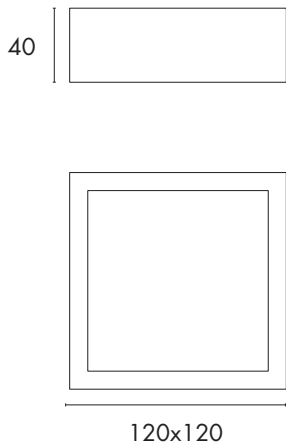

Improved
Greater tightness IP43
Best aesthetics without screws or slots
Easy installation
Safety cable
Regulation and control admitted

264 08 - 21 8 0 - 90

Table with 6 columns: 1 - Model, 2 - W, 3 - Driver, 4 - Brand Chip, 5 - K, 6 - Color. Row 1: 264, 8, 21 - ON-OFF AC220-240V PF >0,9, 8 - Edison, 0 - CCT Switch 2700, 90 T. White / Blanco T. / Blanc T.


LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 120 lm/W (4000K) - RG0



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586

26414

Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie





264 14 - 21 8 0 - 90

Table with 6 columns: 1 - Model, 2 - W, 3 - Driver, 4 - Brand Chip, 5 - K, 6 - Color. Row 1: 264, 14, 21 - ON-OFF AC220-240V PF >0,9, 8 - Edison, 0 - CCT Switch 2700, 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RG0



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586

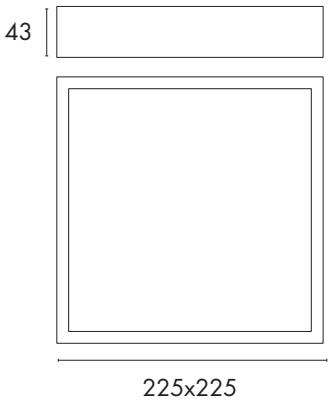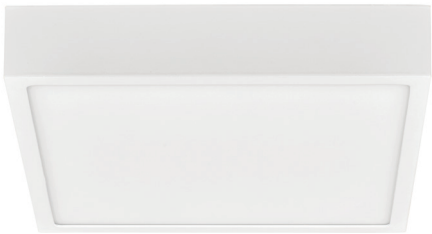

26424



Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie

26430

Downlight LED Superficie
Surface Downlight LED
Luminaire LED en Saillie



Without screws & hole, fixed to ceiling by rotation system

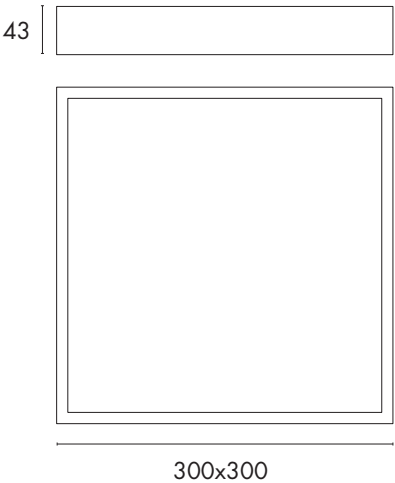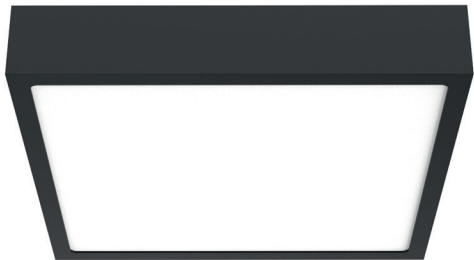

264 24 - 21 8 0 - 90

1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
264	24	21 - ON-OFF AC220-240V PF >0,9	8 - Edison	0 - CCT Switch 2700 1669 Lm System 2880 Lm Chip	01 Black / Negro / Noir
		37 - 1-10V AC220-240V PF >0,95		3000 1712 Lm System 2880 Lm Chip	90 T. White / Blanco T. / Blanc T.
		51 - Trailing Edge AC220-240V PF >0,9		4000 1937 Lm System 2880 Lm Chip	
		D2 - DALI/PUSH AC220-240V PF >0,95			
		SMART CONTROL Page 586			

▼ Accessories not included		
Emergency Kit		
2DCLEDK1	TCI	1 h

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RG0



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Emergency Kit instructions at www.jisoiluminacion.com
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586

264 30 - 21 8 0 - 01

1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
264	30	21 - ON-OFF AC220-240V PF >0,9	8 - Edison	0 - CCT Switch 2700 2074 Lm System 3600 Lm Chip	01 Black / Negro / Noir
		37 - 1-10V AC220-240V PF >0,95		3000 2127 Lm System 3600 Lm Chip	90 T. White / Blanco T. / Blanc T.
		51 - Trailing Edge AC220-240V PF >0,9		4000 2267 Lm System 3600 Lm Chip	
		D2 - DALI/PUSH AC220-240V PF >0,95			
		SMART CONTROL Page 586			

▼ Accessories not included		
Emergency Kit		
2DCLEDK1	TCI	1 h

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RG0




Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Emergency Kit instructions at www.jisoiluminacion.com
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)
See instructions for Dimmable Smart Control Driver - Page 586



21606

Downlight LED Superficie BASIC
BASIC Surface Downlight LED
Luminaire BASIC LED en Saillie

38 |



216 06 - 29 8 4 - 90

1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
216	6	29 - ON-OFF AC85-265V PF >0,5	8 - Sanan	3 - 3000 370 Lm System 648 Lm Chip 4 - 4000 390 Lm System 680 Lm Chip 6 - 6000 405 Lm System 718 Lm Chip	04 Aluminio / Aluminium 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 126lm/W (4000K) - RG1



Productos para uso doméstico o profesional con uso no intensivo.
Products for domestic or professional non-intensive use.
Produits destinés à l'usage domestique ou à l'usage professionnel à usage non intensif.


Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web



21612

Downlight LED Superficie BASIC
BASIC Surface Downlight LED
Luminaire BASIC LED en Saillie

38 |



216 12 - 29 8 4 - 90

1 2 3 4 5 6


1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
216	12	29 - ON-OFF AC85-265V PF >0,5	8 - Sanan	3 - 3000 880 Lm System 1296 Lm Chip 4 - 4000 920 Lm System 1361 Lm Chip 6 - 6000 960 Lm System 1436 Lm Chip	04 Aluminio / Aluminium 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 126lm/W (4000K) - RG1



Productos para uso doméstico o profesional con uso no intensivo.
Products for domestic or professional non-intensive use.
Produits destinés à l'usage domestique ou à l'usage professionnel à usage non intensif.

Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web



21618

Downlight LED Superficie BASIC
BASIC Surface Downlight LED
Luminaire BASIC LED en Saillie

216 18 - 29 8 4 - 90

1 2 3 4 5 6


1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
216	18	29 - ON-OFF AC85-265V PF >0,5	8 - Sanan	3 - 3000 1440 Lm System 1944 Lm Chip 4 - 4000 1490 Lm System 2041 Lm Chip 6 - 6000 1530 Lm System 2155 Lm Chip	04 Aluminio / Aluminium 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 126lm/W (4000K) - RG1



Productos para uso doméstico o profesional con uso no intensivo.
Products for domestic or professional non-intensive use.
Produits destinés à l'usage domestique ou à l'usage professionnel à usage non intensif.

Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web



120x120

21406

Downlight LED Superficie BASIC
BASIC Surface Downlight LED
Luminaire BASIC LED en Saillie

214 06 - 29 8 4 - 90

1 2 3 4 5 6


1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
214	6	29 - ON-OFF AC85-265V PF >0,5	8 - Edison	3 - 3000 375 Lm System 648 Lm Chip 4 - 4000 395 Lm System 680 Lm Chip 6 - 6000 410 Lm System 718 Lm Chip	04 Aluminio / Aluminium 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 126lm/W (4000K) - RG1



Productos para uso doméstico o profesional con uso no intensivo.
Products for domestic or professional non-intensive use.
Produits destinés à l'usage domestique ou à l'usage professionnel à usage non intensif.

Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web



21412

Downlight LED Superficie BASIC
BASIC Surface Downlight LED
Luminaire BASIC LED en Saillie

214 12 - 29 8 4 - 90

1 2 3 4 5 6


1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
214	12	29 - ON-OFF AC85-265V PF >0,5	8 - Sanan	3 - 3000 890 Lm System 1296 Lm Chip 4 - 4000 930 Lm System 1361 Lm Chip 6 - 6000 970 Lm System 1436 Lm Chip	04 Aluminio / Aluminium 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 126lm/W (4000K) - RG1



Productos para uso doméstico o profesional con uso no intensivo.
Products for domestic or professional non-intensive use.
Produits destinés à l'usage domestique ou à l'usage professionnel à usage non intensif.

Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web



21418

Downlight LED Superficie BASIC
BASIC Surface Downlight LED
Luminaire BASIC LED en Saillie

214 18 - 29 8 4 - 90

1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
214	18	29 - ON-OFF AC85-265V PF >0,5	8 - Sanan	3 - 3000 1450 Lm System 1944 Lm Chip 4 - 4000 1500 Lm System 2041 Lm Chip 6 - 6000 1510 Lm System 2155 Lm Chip	04 Aluminio / Aluminium 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 126lm/W (4000K) - RG1



Productos para uso doméstico o profesional con uso no intensivo.
Products for domestic or professional non-intensive use.
Produits destinés à l'usage domestique ou à l'usage professionnel à usage non intensif.


Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web




25015
Aplique LED con Sensor Infrarrojo
Infrared LED Sensor Lamp Wall
Applique LED avec Capteur Infrarouge

Detection Range: 160° / 360°
Detection Distance:
Wall: max. 9,00m. (<24°C)
Ceiling: max. 6,00m. (<24°C)
Time Delay: (ADJUSTABLE)
MIN.: 10 sec. +-3 sec.
MAX.: 5 min. +-1 min.
Ambient Light (Day / Night) (ADJUSTABLE): <3 lux-2000 lux
Detection Motion Speed: 0.6 -1.5 m/s
Installing Height:
Wall: 1.8m-2.5m
Ceiling: 2.2m- 4.00 m

Information Sensor




Height of installation: 1.8-2.5m



Detection Distance: Max. 9m. Pared-Techo 6m

Time Delay / Ambient Light (Day And Night): (Adjustable)

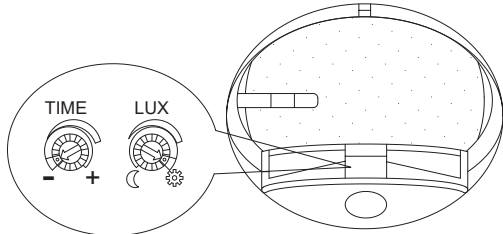

250 15 - 99 6 4 - 90

Table with 6 columns: 1 - Model, 2 - W, 3 - Driver, 4 - Brand Chip, 5 - K, 6 - Color. Row 1: 250, 15, 99 - ON-OFF AC220-240V PF >0,5, 6 - Sanan, 4 - 4000 1050 Lm System 1800 Lm Chip, 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 30.000H - 120 lm/W (4000K) - RG0



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web


27020

Plafon LED con Sensor Infrarrojo
Infrared LED Sensor Lamp
Plafon LED avec Capteur Infrarouge


Detection Range: 360°.
Detection Distance: max. 6,00m. (<24°C)
Time Delay: (ADJUSTABLE)
MIN.: 10 sec. +- 3 sec.
MAX.: 3 min. +- 30 sec.
Ambient Light (Day / Night) (ADJUSTABLE): <3 lux – 2000 lux
Detection Motion Speed: 0.6 - 1.5 m/s
Installing Height: 2.2m. - 4.00 m



Information Sensor




Height of installation: 2.2-4m



Detection Distance: Max. 6m

Time Delay / Ambient Light (Day And Night): (Adjustable)

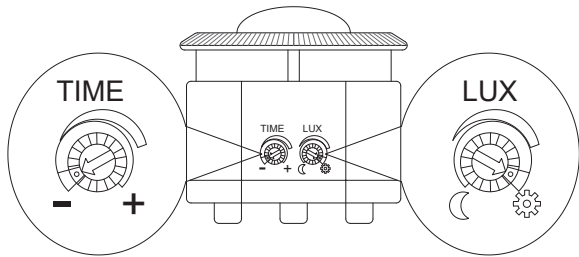

270 20 - 99 6 4 - 90

Table with 6 columns: 1 - Model, 2 - W, 3 - Driver, 4 - Brand Chip, 5 - K, 6 - Color. Row 1: 270, 20, 99 - ON-OFF AC220-240V PF >0,9, 6 - Sanan, 4 - 4000 1440 Lm System 2400 Lm Chip, 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 30.000H - 120 lm/W (4000K) - RG0



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web

