PRO

PROFESSIONAL

2025

INDUSTRIAL

JISO ILUMINACION SPAIN

Industrial

Waterproof Screen

INDUSTRIAL
Waterproof Screen

I Waterproof Screen

600 mm

00418
18W
P. 515

00418-D9
18W - Dim DALI/PUSH
P. 521

1200 mm

00436
36W
P. 517

00436-D9
36W - Dim DALI/PUSH
P. 522

00436-86
36W - Emergency Kit
P. 525

04120D
Without Technology - 1 Tube
P. 527

04120DD
Without Technology - 2 Tubes
P. 529

1500 mm

00450
50W
P. 519

00450-D9
50W - Dim DALI/PUSH
P. 523

04150D
Without Technology - 1 Tube
P. 530

04150DD
Without Technology - 2 Tubes
P. 531

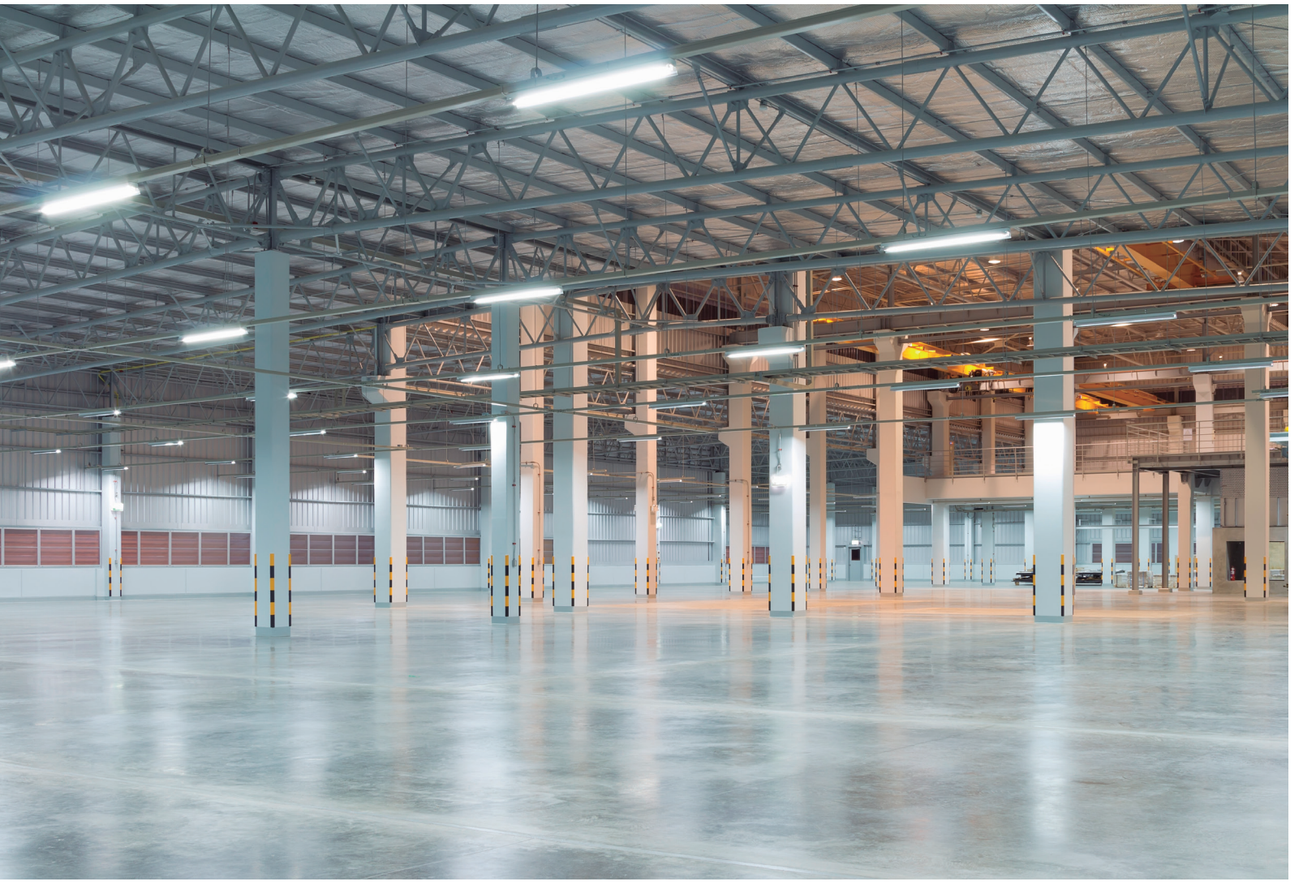

00418

Pantalla Estanca LED
LED Waterproof Screen
Panneau LED Étanche



Continuous connection

Ref.	W	Unit in continous
00418	18	≤50*

004 18 - 16 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
004	18	16 - ON-OFF AC220-240V PF >0,95	8 - Sanan	4 - 4000 2344 Lm System 2520 Lm Chip 6 - 6500 2462 Lm System 2520 Lm Chip	90 T. White / Blanco T. / Blanc T.

Diametro de cable Ø 8 / 12 mm
Medida cable 1,5mm²
Cable diabeter Ø 8 / 12 mm
Cable size 1,5mm²
Diamêtre de câble Ø 8 / 12 mm
Mesure de câble 1,5mm²

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 140lm/W - RG1

RoHS CE 120° 50/60Hz IP 65 650° IK 08 UGR <19 PC 1/16 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

00436

Pantalla Estanca LED
LED Waterproof Screen
Panneau LED Étanche



FEATURES

New Desing

Our waterprof screen 004 offers an efficient and safe solution for lighting spaces with high humidity or exposure to water. Its new design allows for easy installation on flat surfaces, such as ceilings, and adapts to different environments, both indoors and outdoors.
This is a **high quality luminaire** offering professional performance. **High efficiency** and **high light package.** It is **guaranteed for 5 years** and can be **dimmed** via **DALI** or **1-10V**. It is ideal for projects that require flexibility and efficiency.

Technical improvements

Continuous connection
Extra cap included
Stainless **Steel Clips**
The **plug** and **caps** included are for double sides or rear entry

Continuous connection

A feature of our watertight screens is that they allow the continuous connection of one screen to another thanks to their **double sides and set included**.

Security

Our watertight screens have a **safety cable** that holds the two parts of the luminaire together for easy installation.

Continuous connection

Ref.	W	Unit in continous
00436	36	≤30*

004 36 - 16 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
004	36	16 - ON-OFF AC220-240V PF >0,95	8 - Sanan	4 - 4000 4735 Lm System 5040 Lm Chip 6 - 6500 4972 Lm System 5040 Lm Chip	90 T. White / Blanco T. / Blanc T.

Diametro de cable Ø 8 /12 mm
Medida cable 1,5mm²
Cable diabeter Ø 8 /12 mm
Cable size 1,5mm²
Diamêtre de câble Ø 8 /12 mm
Mesure de câble 1,5mm²

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 140lm/W (4000K) - RG1

RoHS CE 120° 50/60Hz IP 65 650° IK 06 UGR <19 PC 1/12 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

00450

Pantalla Estanca LED
LED Waterproof Screen
Panneau LED Étanche



Continuous connection



Ref.	W	Unit in continous
00450	50	≤20*

004 50 - 16 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
004	50	16 - ON-OFF AC220-240V PF >0,95	8 - Sanan	4 - 4000 6562 Lm System 7000 Lm Chip 6 - 6500 6890 Lm System 7000 Lm Chip	90 T. White / Blanco T. / Blanc T.

Diametro de cable Ø 8 /12 mm
Medida cable 1,5mm²
Cable diabeter Ø 8 /12 mm
Cable size 1,5mm²
Diamêtre de câble Ø 8 /12 mm
Mesure de câble 1,5mm²

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 140lm/W (4000K) - RG1

RoHS CE 120° 50/60Hz IP 65 650° IK 08 UGR <19 PC 1/9 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

00418-D9

Pantalla Estanca LED
LED Waterproof Screen
Panneau LED Étanche

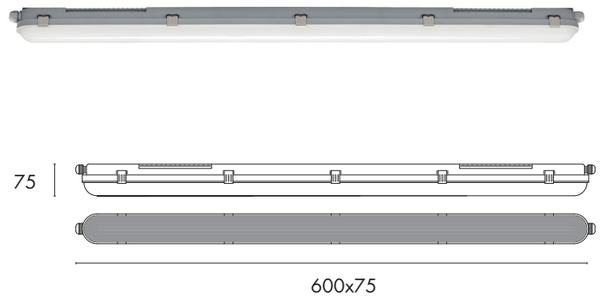

Dimmable DALI/PUSH

Double sides
Conector en ambos lados
Connecteur des deux cotes



Security
Seguridad
Securite

Stainless Steel Clips
Clips de acero
Clips acier

004 18 - D9 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
004	18	D9 - DALI/PUSH AC220-240V PF >0,95	8 - Sanan	4 - 4000 2344 Lm System 2520 Lm Chip	90 T. White / Blanco T. / Blanc T.

Diametro de cable Ø 8 /12 mm
Medida cable 1,5mm²
Cable diabeter Ø 8 /12 mm
Cable size 1,5mm²
Diamêtre de câble Ø 8 /12 mm
Mesure de câble 1,5mm²

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 140lm/W - RG1

RoHS CE 120° 50/60Hz IP 65 650° IK 08 UGR <19 PC 1/16 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

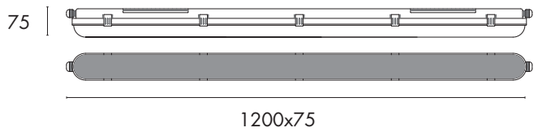

00436-D9

Pantalla Estanca LED
LED Waterproof Screen
Panneau LED Étanche

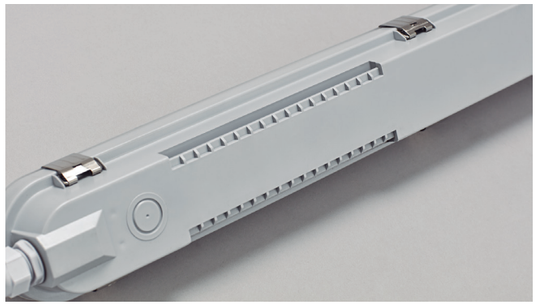

Dimmable DALI/PUSH

004 36 - D9 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
004	36	D9 - DALI/PUSH AC220-240V PF >0,95	8 - Sanan	4 - 4000 4735 Lm System 5040 Lm Chip 6 - 6500 4972 Lm System 5040 Lm Chip	90 T. White / Blanco T. / Blanc T.

Diametro de cable Ø 8 /12 mm
Medida cable 1,5mm²
Cable diabeter Ø 8 /12 mm
Cable size 1,5mm²
Diamêtre de câble Ø 8 /12 mm
Mesure de câble 1,5mm²

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 140lm/W (4000K) - RG1

RoHS CE 120° 50/60Hz IP 65 650° IK 08 UGR <19 PC 1/12 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

00450-D9

Pantalla Estanca LED
LED Waterproof Screen
Panneau LED Étanche

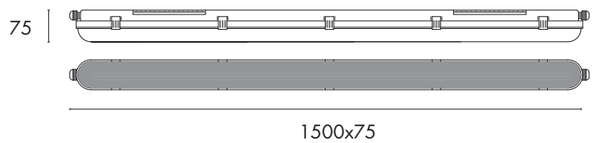

Double sides
Conector en ambos lados
Connecteur des deux cotes



Security
Seguridad
Securite

Stainless Steel Clips
Clips de acero
Clips acier

Dimmable DALI/PUSH

004 50 - D9 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
004	50	D9 - DALI/PUSH AC220-240V PF >0,95	8 - Sanan	4 - 4000 6562 Lm System 7000 Lm Chip 6 - 6500 6890 Lm System 7000 Lm Chip	90 T. White / Blanco T. / Blanc T.

Diametro de cable Ø 8 /12 mm
Medida cable 1,5mm²
Cable diabeter Ø 8 /12 mm
Cable size 1,5mm²
Diamêtre de câble Ø 8 /12 mm
Mesure de câble 1,5mm²

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 140lm/W (4000K) - RG1

RoHS CE 120° 50/60Hz IP 65 650° IK 08 UGR <19 PC 1/12 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

00436-86

Pantalla Estanca LED
LED Waterproof Screen
Panneau LED Étanche



▾ Included Emergency Kit. 3h auto.



LED Indicator
Test Switch

004 36 - 86 8 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
004	36	86 - ON-OFF AC220-240V PF >0,9	8 - Sanan	4 - 4000 4735 Lm System 5040 Lm Chip	90 T. White / Blanco T. / Blanc T.

Diametro de cable Ø 8 /12 mm
Medida cable 1,5mm²
Cable diabeter Ø 8 /12 mm
Cable size 1,5mm²
Diamêtre de câble Ø 8 /12 mm
Mesure de câble 1,5mm²

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 140lm/W - RG1

RoHS CE 120° 50/60Hz IP 65 650° IK 08 UGR <19 PC 1/9 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

WATERPROOF SCREEN EMPTY

Polycarbonate diffuser
Difusor de policarbonato
Diffuseur en polycarbonate

Polycarbonate body
Cuerpo de policarbonato
Corps en polycarbonate

Polycarbonate clips
Clips de policarbonato
Clips polycarbonate

Screen for 1 LED tube. Ref 04120D & 04150D
Pantalla para 1 tubo LED. Ref 04120D & 04150D
Panneau pour un tube LED. Ref 04120D & 04150D

OPCIONAL
Metal clips.
Clips de metal.
Clips métalliques.

Screen for 2 LED tube. Ref 04120DD & 04150DD
Pantalla para 2 tubos LED. Ref 04120DD & 04150DD
Panneau pour deux tubes LED. Ref 04120DD & 04150DD

04120D

Pantalla Estanca Vacia para 1 Tubo LED
Empty Waterproof Screen for 1 LED Tube
Panneau Étanche Vide pour 1 tube LED



04120D - 90
1 2

▼ Accessories not included

1 - Model	5 - Color
04120D	90 Tec. White / Blanco Téc. / Blanc Tech.

Metal Clip
DC04120-05 (set 12 pzs.)

▶ *Plastic clip & pack presaestopa included*

RoHS CE 120° Máx. 18W Tube No Incl. Lampholder G13 DRIVER Incl. IK 08 IP 65 PC 1/12 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

04120DD

Pantalla Estanca Vacia para 2 Tubos LED
Empty Waterproof Screen for 2 LED Tubes
Panneau Étanche Vide pour 2 tubes LED



04120DD - 90
1 2

▼ Accessories not included

Metal Clip
DC04120-05 (set 12 pzs.)

1 - Model	5 - Color
04120DD	90 Tec. White / Blanco Téc. / Blanc Tech.

▶ *Plastic clip & pack presaestopa included*

RoHS CE 120° Máx. 2x18W Tube Incl. Lampholder G13 DRIVER Incl. IK 08 IP 65 PC 1/10 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

04150D

Pantalla Estanca Vacia para 1 Tubo LED
Empty Waterproof Screen for 1 LED Tube
Panneau Étanche Vide pour 1 tube LED

70



1568x65

04150D - 90
1 2

1 - Model	5 - Color
04150D	90 Tec. White / Blanco Téc. / Blanc Tech.

▼ Accessories not included

Clip Metal

DC04150-05 (set 12 pzs.)

▶ *Plastic clip & pack presaestopa included*

RoHS CE 120° Máx. 24W Tube No Incl. Lampholder G13 DRIVER Incl. IK 08 IP 65 PC 1/12 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

04150DD

Pantalla Estanca Vacia para 2 Tubos LED
Empty Waterproof Screen for 2 LED Tubes
Panneau Étanche Vide pour 2 tubes LED

68



1560x100

04150DD - 90
1 2

1 - Model	5 - Color
04150DD	90 Blanco Téc. / Blanc Tech.

▼ Accessories not included

Clip Metal

DC04120-05 (set 12 pzs.)

▶ *Plastic clip & pack presaestopa included*

RoHS CE 120° Máx. 2x24W Tube Incl. Lampholder G13 DRIVER Incl. IK 08 IP 65 PC 1/8 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

Flood Light

I Flood Light

NEW

00750-1M
20W, 30W, 50W - CCT
P. 539

NEW

07200-1M
100W, 150W, 200W - CCT
P. 541

07100
100W
P. 545

07150
150W
P. 547

07200
200W
P. 549

FEATURES

07200-1M

100W - 150W - 200W
2700K - 4000K - 6000K
Connector IP67 included

00750-1M

20W - 30W - 50W
2700K - 4000K - 6000K

Multipower
Multipotencia
Multipouvoirs

Multitemperature
Multitemperatura
Multitempérature



Anti-condensation valve
Válvula anticondensación
Valve anti-condensation

IP66

360° Rotation
Rotación 360°
Rotation de 360°

Easy installation
Fácil instalación
Installation facile

00750-1M90

Proyector Exterior LED CCT
LED Flood Light CCT
Projecteur Extérieur LED CCT

NEW



20W

2700K - 1914 lm
4000K - 2139 lm
6000K - 2054 lm

30W

2700K - 2674 lm
4000K - 3060 lm
6000K - 2864 lm

50W

2700K - 3798 lm
4000K - 4576 lm
6000K - 4054 lm

007 50 - 1M 9 0 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
007	20 30 50	1M - ON-OFF AC220-240V PF >0,9	9 - Sanan	0 - CCT Switch 2700 3798 Lm System 5000 Lm Chip 4000 4576 Lm System 5000 Lm Chip 6000 4054 Lm System 5000 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 35.000H - 100lm/W (4000K) - RG0

RoHS 100° 50/60Hz IP 66 CCT 180° 650° IK 08 ALUM 1/20 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

07200-1M90

Proyector Exterior LED CCT
LED Flood Light CCT
Projecteur Extérieur LED CCT



NEW

100W

2700K - 9687 lm
4000K - 11022 lm
6000K - 10442 lm

150W

2700K - 13260 lm
4000K - 15514 lm
6000K - 14259 lm

200W

2700K - 16108 lm
4000K - 19449 lm
6000K - 17303 lm

07 200 - 1M 9 0 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
07	100 150 200	1M - ON-OFF AC220-240V PF >0,9	9 - Sanan	0 - CCT Switch 2700 16108 Lm System 20000 Lm Chip 4000 19449 Lm System 20000 Lm Chip 6000 17303 Lm System 20000 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 35.000H - 100lm/W (4000K) - RG0

RoHS CE 100° 50/60Hz IP 66 CCT 180° 650° IK 08 ALUM 1/6 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

Easy installation

Wide range of finishes, meassures & powers

Fast connection system











07100

Proyector Exterior LED
LED Flood Light
Projecteur Extérieur LED

335x265 54

07 100 - 19 9 4 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
07	100	19 - ON-OFF AC220-240V PF >0,9	9 - Smalite	4 - 4000 10502 Lm System 12500 Lm Chip 6 - 6000 11027 Lm System 13125 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 30.000H - 125lm/W (4000K) - RG0

RoHS CE 120° 50/60Hz IP 65 180° 650° IK 07 ALUM 1/6 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

07150

Proyector Exterior LED
LED Flood Light
Projecteur Extérieur LED

400x320 59

07 150 - 19 9 4 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
07	150	19 - ON-OFF AC220-240V PF >0,9	9 - Smalite	4 - 4000 16342 Lm System 18750 Lm Chip 6 - 6000 17158 Lm System 19688 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 30.000H - 125lm/W (4000K) - RG0

RoHS CE 120° 50/60Hz IP 65 180° 650° IK 07 ALUM 1/6 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

07200

Proyector Exterior LED
LED Flood Light
Projecteur Extérieur LED



07 200 - 19 9 4 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
07	200	19 - ON-OFF AC220-240V PF >0,9	9 - Smalite	4 - 4000 21661 Lm System 25000 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 30.000H - 125lm/W (4000K) - RG0

RoHS 120° 50/60Hz IP 65 180° 650° IK 07 ALUM 1/4 3 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

High Bay

INDUSTRIAL
High Bay

I High Bay

05150-3M
100W, 120W, 150W - CCT
P. 555

05240-3M
150W, 200W, 240W - CCT
P. 557

05100
100W
P. 561

05150
150W
P. 563

I Accessories

DC05-SENSOR
For High Bay -3M
P. 558

DCPROTECTOR-150
For High Bay 05150-3M
P. 559

DCREFLECTOR-150
for High Bay 05150-3M
P. 559

DC05-DALI
DALI converter
P. 565

CONECIP67I03
IP97 Connector
P. 565

Switch CCT
Multipower
Multitemperature
On/Off & 0-10V
High Efficiency 174 lm/w

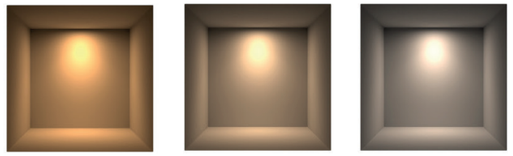

3000K 4000K 5000K

100W

3000K - 14225 lm
4000K - 15387 lm
5000K - 15188 lm

120W

3000K - 16613 lm
4000K - 18070 lm
5000K - 17853 lm

150W

3000K - 20670 lm
4000K - 22444 lm
5000K - 21666 lm

05150-3M90

Campana Industrial LED CCT
Industrial LED High bay CCT
Suspension Tertiaire LED CCT





▼ Accessories not included

Sensor
DC05-SENSOR

Protector
DCPROTECTOR-150

Reflector
DCREFLECTOR-150

IP67 Connector
CONECIP67I03

DALI-PVVM converter
DC05DALI

05 150 - 3M 9 0 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
05	100 120 150	3M - 0-10V AC220-240V PF >0,9	9 - Lumileds	0 - CCT Switch 3000 20670 Lm System 26100 Lm Chip 4000 22444 Lm System 26100 Lm Chip 5000 21666 Lm System 26100 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 174lm/W (4000K) - RG1

RoHS CE 90° 50/60Hz IP 65 CCT 650° IK 08 ALUM 1/1 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

150W

3000K - 23099 lm
4000K - 24808 lm
5000K - 24889 lm

200W

3000K - 29176 lm
4000K - 31701 lm
5000K - 31097 lm

240W

3000K - 33379 lm
4000K - 36421 lm
5000K - 35484 lm

05240-3M90

Campana Industrial LED
Industrial LED High bay
Suspension Tertiaire LED





05 240 - 3M 9 0 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
05	150 200 240	3M - 0-10V AC220-240V PF >0,9	9 - Lumileds	0 - CCT Switch 3000 33379 Lm System 41760 Lm Chip 4000 36421 Lm System 41760 Lm Chip 5000 35484 Lm System 41760 Lm Chip	01 Negro / Noir

▼ Accessories not included

Sensor
DC05-SENSOR

IP67 Connector
CONECIP67I03

DALI-PWM converter
DC05DALI

LED CHIP: SMD 2835 - CRI>80 - L70B10 / 50.000H - 174lm/W (4000K) - RG1

RoHS CE 90° 50/60Hz IP 65 CCT 650° IK 08 ALUM 1/1 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)



DC05-SENSOR

Sensor de movimiento para Ref. 05150-3M y 05240-3M
Motion sensor for Ref. 05150-3M and 05240-3M
Détecteur de mouvement pour Ref. 05150-3M et 05240-3M

Control:	Dimmable 0-10V
Power supply:	12V-24V DC, >30mA
Detection radius:	20%/50%/75%/100% (1-8m)
Mounting height:	Max 40ft.(12meters)
Time setting:	10s/1min/5min/10min/15min/20min/30min/60min
Temperature:	-4°F ± 140°F (-20°C ± 60°C)

Mando Ref. DC05-MANDO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

DCPROTECTOR-150

Protector para Ref. 05150-3M90
Protector for Ref. 05150-3M90
Protecteur pour Ref. 05150-3M90

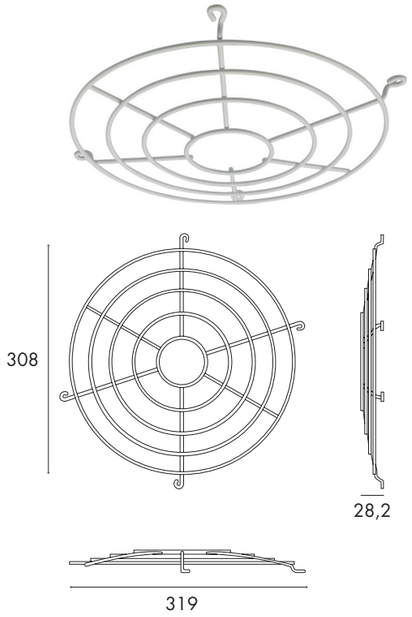

DCREFLECTOR-150

Reflector para Ref. 05150-3M90
Reflector for Ref. 05150-3M90
Réflecteur pour Réf. 05150-3M90

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

05100

Campana Industrial LED
Industrial LED High bay
Suspension Tertiaire LED



▼ Accessories not included

		- Degree
Included	Optional	Optional
120°	R00 - 90°	E00 - 60°

IP67 Connector
CONECIP67I03

Optics
DC05100-60
DC05100-90
DC05100-120

05 100 - 18 8 4 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
05	100	18 - ON-OFF AC220-240V PF >0,95	8 - Sanan	4 - 4000 12900 Lm System 13500 Lm Chip 6 - 6000 13500 Lm System 14500 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD 3030 - CRI>80 - L70B10 / 35.000H - 135lm/W (4000K) - RG0

RoHS CE 120° 50/60Hz IP 65 650° IK 08 ALUM 1/1 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

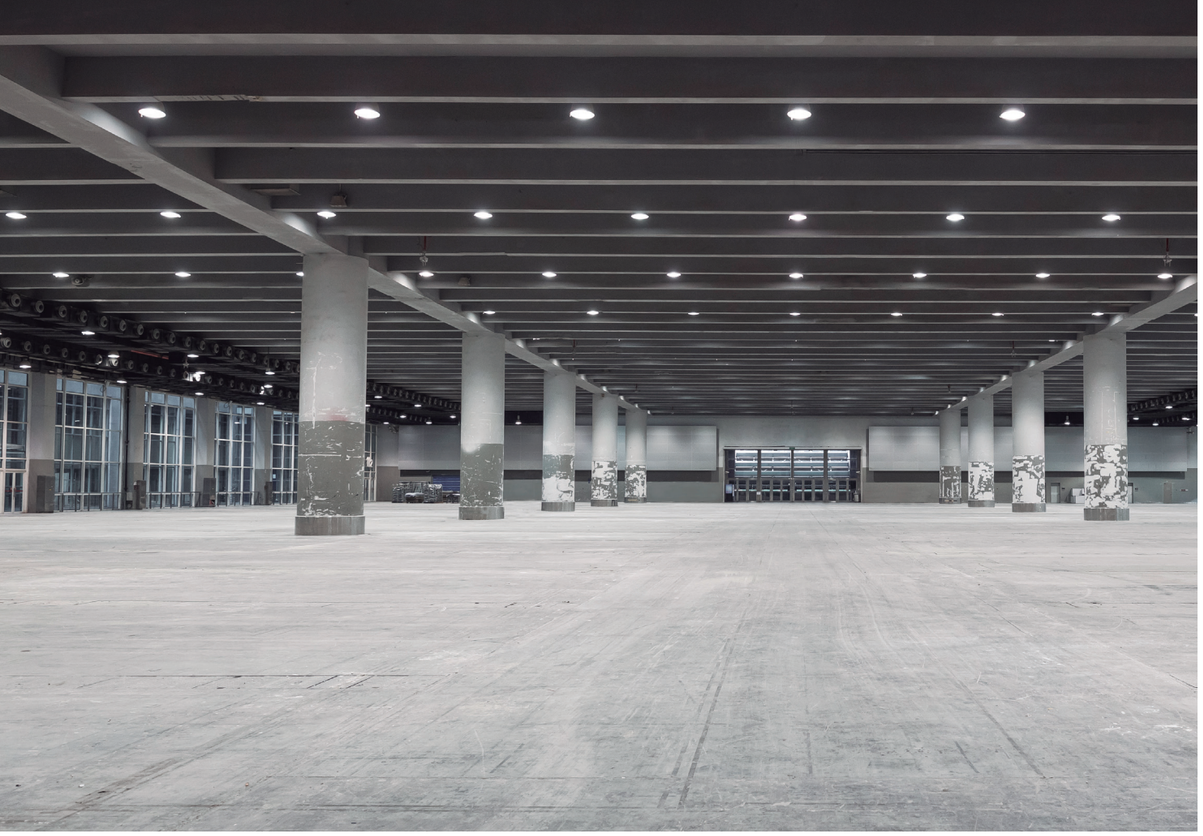

INDUSTRIAL

Light Integrated LED I **High Bay**

05150

Campana Industrial LED
Industrial LED High bay
Suspension Tertiaire LED





FEATURES

Technical improvements in driver

Flicker reduction from <1 to <0,5%
Higher efficiency from <93 to <94,5%
Improved output protections to reduce the risk of PCB damage

Security

Overheating protection
6KV overvoltage protection
Short-circuit protection

Openign

All models available in120°, 90° and 60°

Dimmables options

0-10V adjustable high bays in 150W and 200W
05200 high bay with plus presence sensor DALI converter

Warranty

Professional product
Great reliability

Immediate service

Immediate delivery

Accessories

Optica
Seat/Bridge to hold hood
0-10V to DALI converter

Complete range

Colour temperature 4000K and 6000K
Powers 100W, 150W, 200W and 240W

05 150 - 18 8 4 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
05	150	18 - ON-OFF AC220-240V PF >0,95	8 - Sanan	4 - 4000 19120 Lm System 20250 Lm Chip 6 - 6000 20073 Lm System 21000 Lm Chip	01 Black / Negro / Noir

▼ Accessories not included

- Degree

Included	Optional	Optional
120°	R00 - 90°	E00 - 60°

IP67 Connector

CONECIP67I03

Optics

DC05100-60
DC05100-90
DC05100-120

LED CHIP: SMD 3030 - CRI>80 - L70B10 / 35.000H - 135lm/W (4000K) - RG0

RoHS CE 120° 50/60Hz IP 65 650° IK 08 ALUM 1/1 5 years Warranty PRO

For more information, please consult our website / Para más información consultar página web / Pour plus d'informations, consultez le site web
Consult geneal issues - www.jisoiluminación.com (Download - Technical Information)

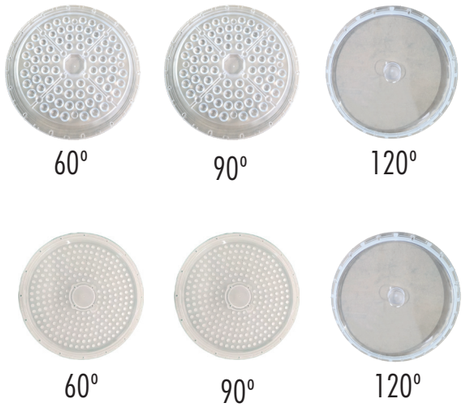

DC05

Óptica 60º, 90º, 120º
Optics 60º, 90º, 120º
Optique 60º, 90º, 120º

Ref.	Accessory for
DC05100-60	05100
DC05100-90	05100
DC05100-120	05100
DC05150-60	05150
DC05150-90	05150
DC05150-120	05150

DC05-DALI

Conversor DALI/PWM. Ref. 05150-38 y 05200-38
DALI/PWM converter for Ref. 05150-38 and 05200-38
Convertisseur DALI/PWM pour Ref. 05150-38 et 05200-38

Regulation Range:	10%-100%
Regulation:	DALI input/PWM output
Input Voltage BUS DALI:	10-22.5Vdc
Size:	Ø30x110mm

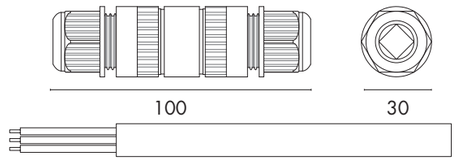

Convertidor de señal, no aislado, que transforma la señal DALI, proveniente de un BUS DALI, en señal PWM y que es compatible con las campanas industriales regulables de la serie 05 de JISO ILUMINACION. El conversor se ajusta al protocolo DALI IEC 62386-101, 102, 103, 207 y, gracias a su grado de protección IP67, siempre que se instale correctamente, confiere protección frente al agua a la conexión que se establece en su interior.

Signal converter, non-isolated, to change DALI signal, from a BUS DALI, into PWM signal. Compatible with industrial High-Bays series 05 from JISO ILUMINACION.
It conforms to the DALI protocol IEC 62386-101, 102, 103, 207 and IP 67 rating.

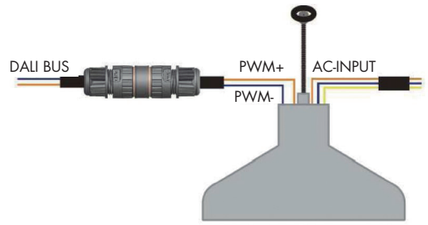

CONECIP67I03

Conector de cable IP67
Cable connector IP67
Connecteur de câble IP67

Diametro de cable Ø 7/8,9 mm
Cable diameter Ø 7/8,9 mm
Diamètre du câble Ø 7/8,9 mm

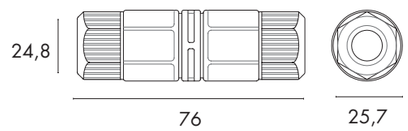

JISÓ
ILUMINACION

www.jisoiluminacion.com